

Датчики 3D (трехмерного зрения)

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884


Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>

3-D stereo sensor

VSE1000-F400-B12-A1000

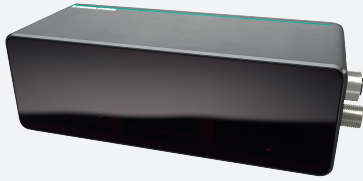


- Resolution 1300 x 1080 pixel
- Gigabit-Ethernet (GigE) interface
- Measurement data preprocessing
- Simple and fast mounting
- Intuitive and user-friendly operating software ViSolution
- Sturdy metallic housing
- C# API

The sensor uses stereo-vision technology and structured light to capture objects in 3-D. It can acquire raw 3-D data at a range of 300 to 900 mm with an image resolution of 1.4 MP and a frame rate of 10 fps. The sensor features a Gigabit Ethernet interface, intuitive operating software, rugged metal housing, and an API interface. As a raw data sensor, it is suitable for a variety of applications that require detailed contour detection.



Dimensions

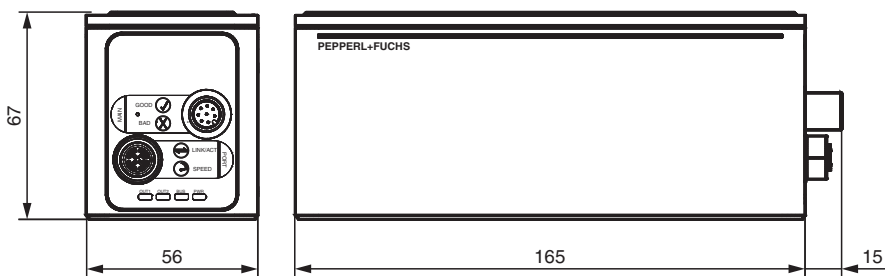

Technical Data

Search characteristics		
Structured light		yes
General specifications		
Detection range		max. 900 mm
Measurement range		horizontal: 400 mm vertical: 300 mm deep : 300 mm
Light source		LED projector
Light type		Infrared Wave length 850 nm
Light direction		Structured light
Laser nominal ratings		
Laser class		
Target velocity		max. 1 m/s
Object reflectivity		> 18 %
Picture detail		dependant of operating distance
Depth of focus		max. 300 mm
Resolution		X 0.5 mm Y 0.5 mm Z 1 mm at 900 mm read distance
Nominal ratings		
Camera		

Technical Data


Number of pixels		1300 x 1080 pixels
Shutter		Global shutter
Frame rate		10 fps
Image resolution		1.4 MP
Disparity		128
Functional safety related parameters		
MTTF _d		20 a
Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		4 LEDs (OUT 1, OUT 2, BUS, PWR)
Electrical specifications		
Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 450 mA
Power consumption	P ₀	max. 10 W , Outputs without load
Interface		
Interface type		Ethernet TCP/IP
Transfer rate		1 GBit/s
Input		
Control input		1 digital input and External trigger
Conformity		
Photobiological safety		Risk group 0 according to IEC 62471
Compliance with standards and directives		
Standard conformity		
Noise immunity		EN 61000-6-2:2005
Emitted interference		EN 61000-6-4:2007/A1:2011
Degree of protection		EN 60529
Shock and impact resistance		EN 60068-2-27:2009
Function and system design		
Measuring principle		3-D image data Stereo vision Structured light
Application		3-D raw data
Approvals and certificates		
CE conformity		CE
UKCA conformity		UKCA
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Operating temperature		-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)
Relative humidity		< 99 % , noncondensing
Mechanical specifications		
Degree of protection		IP65/IP67
Connection		M12 connector, 8-pin , A-coded 8-pin M12 socket , X-coded
Material		
Housing		metal
Optical face		Plastic pane
Installation		M5 screws
Mass		approx. 800 g
Tightening torque, fastening screws		max. 2 Nm
Dimensions		
Height		180 mm
Width		56 mm
Depth		67 mm

Technical Data


General information

Note	INVISIBLE LED , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS
------	---

Connection Assignment

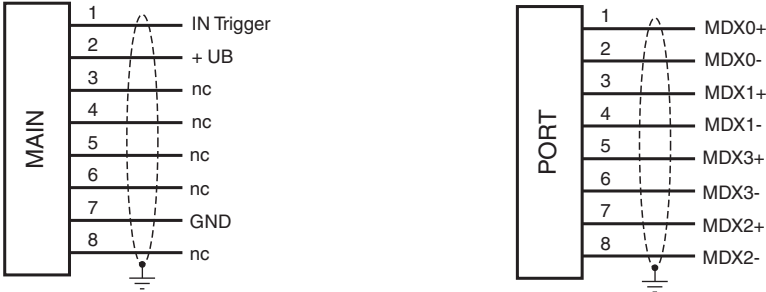


Connection

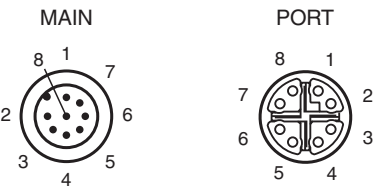

3-D Time-of-Flight sensor

SmartRunner Explorer 3-D

VTE7500-F400-B12-A1500

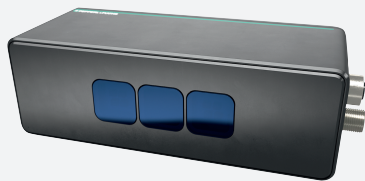


- Resolution 640 x 480 pixel
- Gigabit-Ethernet (GigE) interface
- Simple and fast mounting
- Intuitive and user-friendly operating software ViSolution
- Sturdy metallic housing
- C# API
- DuraBeam technology

The 3-D time-of-flight sensor is based on the principle of measuring time-of-flight of infrared light. This allows raw 3-D data from objects at a range of 400 to 7500 mm to be acquired with an image resolution of 0.3 MP and a frame rate of 30 fps. The sensor features a Gigabit Ethernet interface, intuitive operating software, rugged metal housing, and an API interface. The sensor is especially suitable for dynamic applications with a larger measuring range.



Dimensions

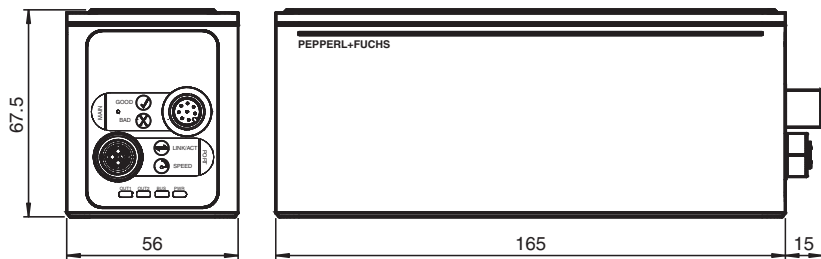


Technical Data

General specifications		
Detection range		max. 7500 mm min. 400 mm
Light source		Vertical-cavity surface-emitting laser
Light type		Infrared
Laser nominal ratings		
Laser class		1
Wave length		940 nm
Target velocity		max. 1 m/s
Object reflectivity		> 18 %
Picture detail		dependant of operating distance
Opening angle		47 ° x 35 °
Nominal ratings		
Camera		


Technical Data

Number of pixels		640 x 480 pixels
Shutter		4 - Phases Global shutter
Frame rate		30 fps
Image resolution		0.3 MP
Functional safety related parameters		
MTTF _d		20 a
Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		4 LEDs (OUT 1, OUT 2, BUS, PWR)
Electrical specifications		
Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 450 mA
Power consumption	P ₀	max. 13 W , Outputs without load
Interface		
Interface type		Ethernet TCP/IP
Transfer rate		1 GBit/s
Input		
Control input		1 digital input and External trigger
Compliance with standards and directives		
Standard conformity		
Noise immunity		EN 61000-6-2:2005
Emitted interference		EN 61000-6-4:2007/A1:2011
Degree of protection		EN 60529
Shock and impact resistance		EN 60068-2-27:2009
Laser class		IEC 60825-1:2014
Function and system design		
Measuring principle		Time-of-Flight
Application		3-D raw data
Approvals and certificates		
CE conformity		CE
UKCA conformity		UKCA
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Operating temperature		-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)
Relative humidity		< 99 % , noncondensing
Mechanical specifications		
Degree of protection		IP65 / IP67
Connection		M12 connector, 8-pin , A-coded 8-pin M12 socket , X-coded
Material		
Housing		metal
Optical face		Plastic pane
Installation		M5 screws
Mass		approx. 800 g
Tightening torque, fastening screws		max. 2 Nm
Dimensions		
Height		180 mm
Width		56 mm
Depth		67.5 mm
General information		
Note		INVISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS , LASER ENERGY EXPOSURE NEAR APERTURE MAY CAUSE BURNS

Connection Assignment

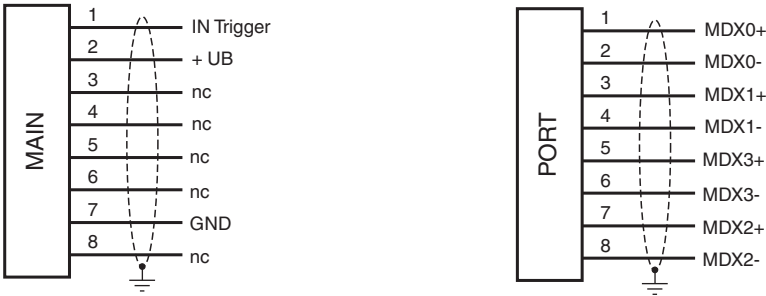

Connection

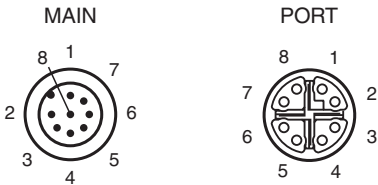

Safety Information



LASERLICHT
LASER LIGHT

LASER KLASSE 1
CLASS 1 LASER PRODUCT

Safety Information

Laser Class 1 Information

The irradiation can lead to irritation especially in a dark environment. Do not point at people!

Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>