

Емкостные концевые выключатели LCL1

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59


Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>



Capacitive limit switch

LCL1



- Limit switch for bulk solids
- Device with rod probe
- Complete unit consisting of the probe and electronic insert
- Integrated active build-up compensation: exact switch point, even with strong build-up
- Mechanically rugged: no wearing parts, long operating life, maintenance-free



Function

The capacitive limit switch is designed for limit detection of light bulk solids, e. g. grain products, flour, milk powder, animal feed, cement, chalk or plaster.

Versions:

- Device with 140 mm (5.5 inch) rod probe, for bulk solids
- Relay output (potential-free change-over contact) with AC or DC connection
- PNP output with 3-wire DC connection

Connection

Connection type E5, 3-wire DC connection (example)

3-wire DC connection

F: Fine-wire fuse, 500 mA


R: connected load, e. g. PLC, DCS, relay

M: Connection to ground, silo or metal parts silo

E: Grounding


The LCL is protected against reverse polarity. In case of mixing up the connections, the green LED does not illuminate "ready to operate".

PE-connection and PAL-connection for LCL1 are unnecessary.

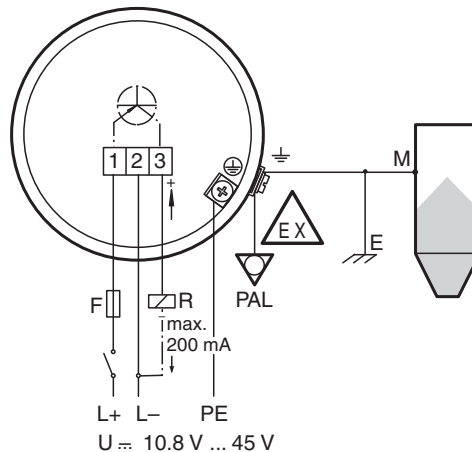

Other connection types see section electrical connection.

Dimensions

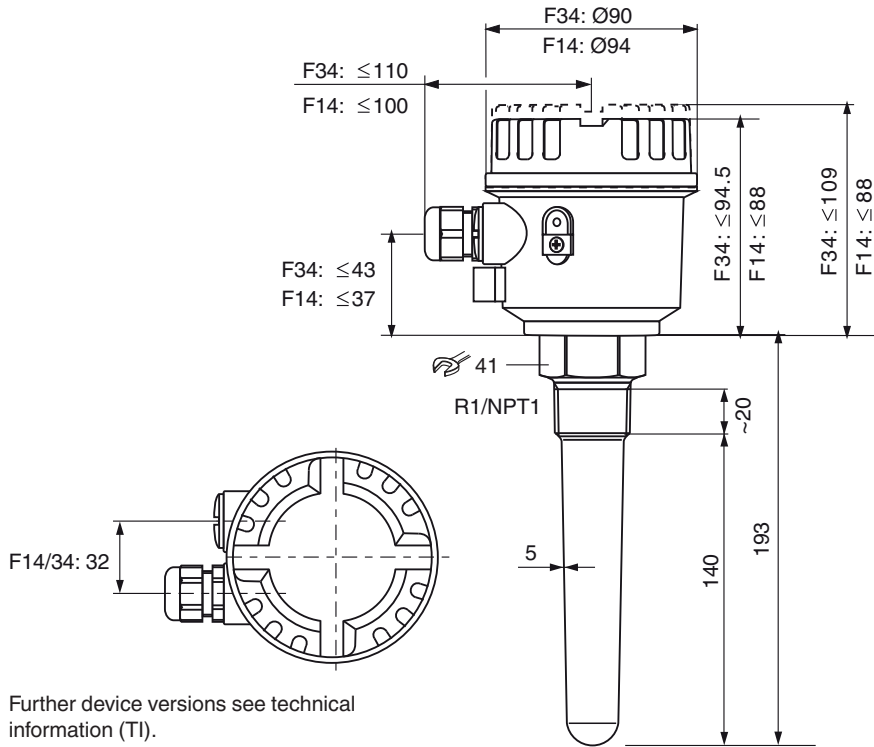

Technical Data

General specifications		
Measuring method		A metal plate at the end of the probe, within the insulation, and the surroundings (e. g. the silo walls) combine to form the two electrodes of a capacitor. If the probe is covered or free of material, then the capacitance changes and the LCL switches.
Equipment architecture		The measuring system consists of: - the device - a supply point - the connected control systems, switching units, signalling systems (e. g. lamps, horns, PCS, PLC, etc.)
Construction type		device with rod probe
Operating mode		MAX = maximum safety: The device switches if the probe is covered or if the supply voltage is disconnected in a safety-oriented manner (signal on alarm). example application: overspill protection MIN = minimum safety: The device switches if the probe is uncovered or if the supply voltage is disconnected in a safety-oriented manner (signal on alarm). example application: dry-running protection
Series		LCL1
Supply		
Rated voltage	U _r	electrical connection E5: 10.8 ... 45 V DC, short-term pulse on 55 V DC electrical connection WA: 20 ... 235 V AC, 50/60 Hz or 20 ... 55 V DC
Current consumption		electrical connection E5: max. 30 mA, reverse-polarity-proof electrical connection WA: max. 130 mA
Electrical specifications		
Surge protection		overvoltage category III
Input		

Technical Data

Measured variable		limit level (limit value)
Measurement range		dielectric constant ≥ 1.6
Output		
Switch-on delay	t_{on}	correct switching after max. 1.5 s
Output signal		connection E5: switching PNP, $I_{max} = 200 \text{ mA}$ - overload and short circuit protection - residual voltage at transistor at $I_{max} < 2.9 \text{ V}$ connection WA: contact change-over, potential-free - $U_{max} = 253 \text{ V}$ - $I_{max} = 4 \text{ A (AC)}$ - $P_{max} = 1000 \text{ VA}$, $\cos \phi = 1$, $P_{max} = 500 \text{ VA}$, $\cos \phi > 0.7$
Signal on alarm		connection E5: $< 100 \mu\text{A}$ connection WA: relay de-energized
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2006 , EN 61326-2-3:2006
Low voltage		
Directive 2014/35/EU		EN 61010-1:2010
Conformity		
Electromagnetic compatibility		NE 21
Degree of protection		IEC 60529:2001
Vibration resistance		EN 60068-2-64
Climate class		EN 60068, part 2-38 (test Z/AD)
Measurement accuracy		
Reference operating conditions		vessel type: plastic vessel, ambient temperature: 73°F (23°C , 296 K), medium temperature: 73°F (23°C , 296 K) medium pressure p_g : 0 bar, medium: dielectric constant = 2.6, conductivity: $< 1 \mu\text{S}$ sensitivity setting: C
Hysteresis		horizontal 4 mm (0.16 inch), vertical 7 mm (0.28 inch)
Long-term drift		horizontal 3 mm (0.12 inch), vertical 6 mm (0.24 inch)
Influence of medium temperature		depending on the filling material
Switching time		approx. 0.5 s when covering and uncovering the sensor
Operating conditions		
Installation conditions		
Installation position		any position
Mounting location		The capacitive limit switch can be installed in silos made of different materials (e. g. metal, plastic, concrete).
Process conditions		
Process temperature		$-40 \dots 130^\circ\text{C}$ ($-40 \dots 266^\circ\text{F}$) $-40 \dots 80^\circ\text{C}$ ($-40 \dots 176^\circ\text{F}$) (Dust-Ex version)
Medium pressure limits		$-1 \dots 25 \text{ bar}$
State of aggregation		solids
Solid contents		$\leq \varnothing 30 \text{ mm}$
Bulk density		$\leq 200 \text{ g/l}$
Ambient conditions		
Ambient temperature		$-40 \dots 80^\circ\text{C}$ ($-40 \dots 176^\circ\text{F}$) $-40 \dots 60^\circ\text{C}$ ($-40 \dots 140^\circ\text{F}$) (Dust-Ex version)
Storage temperature		$-40 \dots 80^\circ\text{C}$ ($-40 \dots 176^\circ\text{F}$)
Shock resistance		device with F34 housing: 7 J
Vibration resistance		$a(\text{RMS}) = 50 \text{ m/s}^2$, $\text{ASD} = 1.25 (\text{m/s}^2)^2/\text{Hz}$, $f = 5 \text{ to } 2000 \text{ Hz}$, $t = 3 \times 2 \text{ h}$
Mechanical specifications		
Degree of protection		IP66, NEMA 4
Connection		gland M20 thread G1/2, NPT1/2
Material		F14 housing: polyester PBT-FR F34 housing F34: aluminum Probe: PPS GF40
Dimensions		max. $\varnothing 94 \text{ mm}$ (3.7 inch), length 391 mm (15.4 inch)

Technical Data

Process connection		thread R1 acc. to EN 10226, BSPT, adapter for R1-1/2 and G1-1/2 see accessories thread NPT1 to ANSI B 1.20.1, adapter for NPT1-1/4 see accessories
Data for application in connection with hazardous areas		
EU-type examination certificate		see instruction manuals (SI)
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013, EN 60079-11:2012, EN 60079-31:2009
General information		
Supplementary documentation		technical information (TI) manuals, brief instructions (BA, KA) instruction manuals (SI)
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable.
Accessories		
Designation		- LCL-Z10 cover with sight glass for F14 housing - LCL-Z11 adapter for R1-1/2, EN 10226 - LCL-Z12 adapter for G1-1/2, DIN ISO 228 - LCL-Z13 adapter for NPT1-1/4, steel - LCL-Z15 adapter for NPT1-1/4, 1.4571

Type Code

This overview does not mark options which are mutually exclusive.

L	C	L	1	–	(1)	K	–	(2)	(3)	(4)	–	(5)
LCL	Device											
LCL	Capacitive limit switch											
1	Design											
1	Device with rod probe											
(1)	Process connection											
Threads												
N3	NPT1, ANSI, PPS											
R3	R1, EN 10226, PPS											
K	Probe length											
K	140 mm											
(2)	Housing											
C	Polyester housing F14, IP66, NEMA 4, thread NPT1/2											
H	Aluminium housing F34, IP66, NEMA 4X, thread NPT1/2											
I	Aluminium housing F34, IP66, NEMA 4X, thread G1/2											
J	Aluminium housing F34, IP66, NEMA 4X, cable gland M20											
P	Polyester housing F14, IP66, NEMA 4, cable gland M20											
Q	Polyester housing F14, IP66, NEMA 4, thread G1/2A											
(3)	Electrical connection											
E5	3-wire, PNP, 10,8 V DC to 45 V DC											
WA	Relay, potential-free change-over contact, 20 AC to 253 V AC, 20 V DC to 55 V DC											
(4)	Additional equipment											
N	without additional equipment											
D	Cover with sight glass											
(5)	Approval											
NA	Version for non-explosion-hazardous area											
CS	CSA, DIP Cl.II, Gr.E-G, Cl.III											
CG	CSA General Purpose											
EX	ATEX II 1/3 D Ex ta/tc IIIC T105°C Da/Dc											
FS	FM, DIP Cl.II,III, Gr.E-G, T5											

Connection


Electronic insert E5

3-wire DC connection

F: fine-wire fuse, 500 mA
 R: connected load, e. g. PLC, DCS, relay
 M: connection to ground, silo or metal parts silo
 E: grounding

The LCL is protected against reverse polarity. In case of mixing up the connections, the green LED does not illuminate "ready to operate".

PE-connection and PAL-connection for LCL1 are unnecessary.

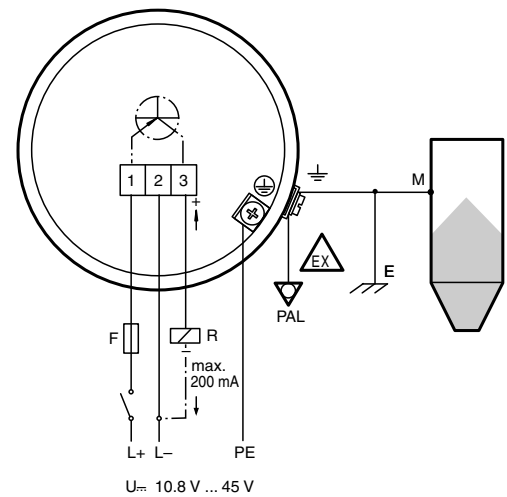


Electronic insert WA

AC/DC connection with relay output

F1: fine-wire fuse for the protection of the relay contact, dependent on the connected load
 F2: fine-wire fuse, 500 mA
 M: connection to ground, silo or metal parts silo
 E: grounding

PE-connection and PAL-connection for LCL1 are unnecessary.

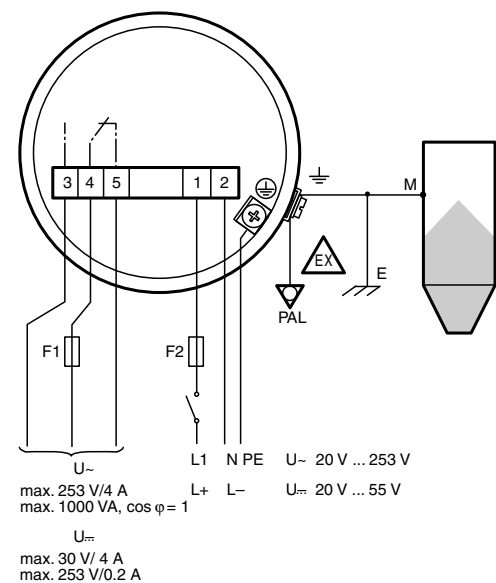

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>