

Датчики предельной вибрации LVL-B2

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>



Vibration Limit Switch

Vibracon

LVL-B2



- Limit switch for bulk solids
- Device with tube extension
- No calibration: easy commissioning (plug and play)
- Insensitive to build-up: maintenance-free operation
- No mechanically moving parts: no wear, long operating life
- Sensor material stainless steel: hardly any abrasion even with building materials
- Insensitive to external vibration and flow noises




Function

The device is a robust level limit switch for silos with fine-grained or coarse-grained, non-fluidised bulk solids. The various designs means the device has a wide range of applications. Certificates are also available for use in dust incensive hazard areas. Typical applications: cereals, coffee beans, sugar, animal feed, rice, detergents, dye powder, chalk, gypsum, cement, sand, plastic granules

Connection


Connection FEM 22 (E5) 3-wire DC connection (example)

- preferably for use with memory programmable controls (PLC), DI modules as per EN 61131-2
- positive signal at the electronics switch output (PNP)
- Output blocked at level limit.

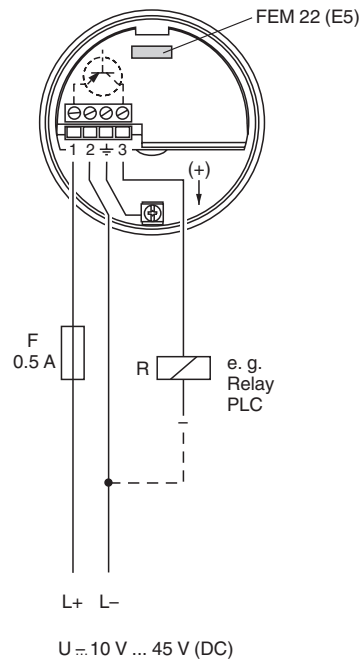

Other connection types see section electrical connection.

Dimensions

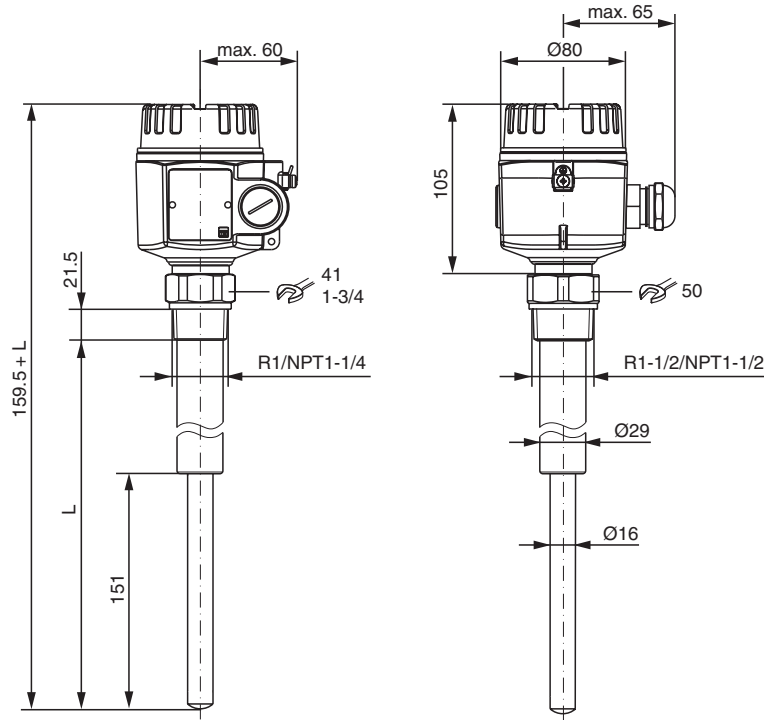

Technical Data

General specifications

Measuring method	A piezoelectric drive excites the vibrating rod of the device to its resonance frequency. If medium covers the vibrating rod, the rod's vibrating amplitude changes (the vibration is damped). The electronics of the device compare the actual amplitude with a target value and indicates whether the vibrating rod is vibrating freely or whether it is covered by medium.	
Equipment architecture	The measuring system consists of: - the device with electronic insert - a supply point - the connected control systems, switching units, signalling systems (e. g. lamps, horns, PCS, PLC, etc.)	
Construction type	device with tube extension	
Operating mode	MAX = maximum safety: The device switches if the probe is covered or if the supply voltage is disconnected in a safety-oriented manner (signal on alarm). example application: overspill protection MIN = minimum safety: The device switches if the probe is uncovered or if the supply voltage is disconnected in a safety-oriented manner (signal on alarm). example application: dry-running protection	
Series	Vibracon LVL-B2	

Supply

Rated voltage	U_r	electronic insert FEM22 (E5): 10 ... 45 V DC electronic insert FEM24 (WA): 19 ... 253 V AC, 50/60 Hz or 19 ... 55 V DC
Ripple		electronic insert FEM22 (E5): max. 5 V, 0 ... 400 Hz
Current consumption		electronic insert FEM22 (E5): max. 18 mA
Power consumption		electronic insert FEM22 (E5): max. 0.81 W electronic insert FEM 24 (WA): max. 1.3 W
Reverse polarity protection		separation voltage 2.2 kV

Electrical specifications

Surge protection	electronic insert FEM22 (E5) : overvoltage category III
------------------	---

Input

Input signal	probe covered - small amplitude probe not covered - large amplitude
Measured variable	level (according to the mounting location and the overall length)

Technical Data

Measurement range		The measuring range depends on the mounting location of the device and the length of the pipe extension selected. The pipe extension is available in the following lengths: 500 mm, 1000 mm, 1500 mm, 20 inch, 40 inch, 60 inch
Output		
Load		electronic insert FEM22 (E5): - load switched via transistor and separate PNP connection - load current: max. 45 V (cyclical overload and short-circuit protection), continuous max. 350 mA - residual current: < 100 µA (for blocked transistor) - capacitive load: max. 0.5 µF for 45 V, max. 1.0 µF for 24 V - residual voltage: < 3 V (for transistor switched through) electronic insert FEM24 (WA): - loads switched via 2 floating change-over contacts - version AC: I max. 6 A, U max. 253 V; P max. 1500 VA, cos φ = 1, P max. 750 VA, cos φ > 0.7 - version DC: I max. 6 A to 30 V, I max. 0.2 A to 125 V - the following applies when connecting a functional extra-low voltage circuit with double insulation as per IEC 1010: sum of voltages of relay output and power supply max. 300 V
Switch-on delay	t _{on}	correct switching after max. 3 s
Output signal		digital
Signal on alarm		electronic insert FEM22 (E5): output signal on power failure or in the event of device failure - < 100 µA electronic insert FEM24 (WA): output signal in event of power failure - relay de-energised
Galvanic isolation		
Input/power supply		electronic insert FEM22 (E5)
Input/Other circuits		electronic insert FEM24 (WA)
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2006 , EN 61326-2-3:2006
Low voltage		
Directive 2014/35/EU		electronic insert FEM24 (WA) : EN 61010-1:2010
Conformity		
Electromagnetic compatibility		NE 21
Degree of protection		IEC 60529:2001
Vibration resistance		EN 60068-2-27
Climate class		EN 60068, part 2-38, fig. 2a
Measurement accuracy		
Measuring frequency		700 ... 800 Hz
Switching time		when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s
Operating conditions		
Installation conditions		
Installation position		see section mounting position
Process conditions		
Process temperature		-40 ... 150 °C (-40 ... 302 °F)
Medium pressure limits		-1 ... 25 bar max. working pressure 25 bar, burst pressure 100 bar
Thermal shock resistance		max. 120 K
State of aggregation		solids
Solid contents		≤ Ø25 mm
Bulk density		≥ 200 g/l, not fluidised
Ambient conditions		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications		
Degree of protection		IP66/IP67, NEMA 4X
Connection		gland M20 thread G1/2, NPT1/2

Technical Data

Material		F16 housing: PTB-FR, cover with transparent glass made of PA12, EPDM cover seal F18 housing: aluminum EN-AC-AISi10Mg, plastic coated cover seal: EPDM process connections, sensor: stainless steel 1.4435/316L
Mass		device with F16 housing, electronic insert FEM24 (WA) and R1 thread: - 500 mm (20 inch) = approx. 1.3 kg - 1000 mm (40 inch) = approx. 2.0 kg - 1500 mm (60 inch) = approx. 2.6 kg
Dimensions		max. Ø85 mm (3.3 inch), length 160 mm (6.3 inch) + L L = 500 mm, 1000 mm, 1500 mm, 20 inch, 40 inch, 60 inch
Process connection		thread R1, R1-1/2 acc. to DIN 2999 thread 1-1/4 - 11-1/2 NPT, 1-1/2 - 11-1/2 NPT acc. to ANSI B 1.20.1
Data for application in connection with hazardous areas		
EU-type examination certificate		see instruction manuals
International approvals		
IECEX approval		see instruction manuals
General information		
Supplementary documentation		technical information (TI) manuals, brief instructions (BA, KA) instruction manuals
Supplementary information		
Accessories		
Designation		- LVL-Z200 sliding sleeve for pressurized container - LVL-Z201 sliding sleeve for pressurized container - LVL-Z202 sliding sleeve for unpressurized container - LVL-Z203 sliding sleeve for unpressurized container

Type Code

This overview does not mark options which are mutually exclusive.

L	V	L	-	B	2	-	(1)	-	(2)	(3)	(4)	A	-	(5)
LVL	Device													
LVL	Vibration limit switch													
B2	Design													
B2	Device with pipe extension													
(1)	Process connection													
Thread														
N3	NPT1-1/4, ANSI, 1.4435/316L													
N5	NPT1-1/2, ANSI, 1.4435/316L													
R3	R1, DIN 2999, 1.4435/316L													
R5	R1-1/2, DIN 2999, 1.4435/316L													
XX	Special version													
(2)	Sensor length													
2	500 mm													
3	1000 mm													
4	1500 mm													
6	20 inch													
7	40 inch													
8	60 inch													
(2)	Housing, cable entrance													
A6	Aluminium housing F18, IP66/IP67, NEMA 4X, cable gland M20													
A7	Aluminium housing F18, IP66/IP67, NEMA 4X, thread NPT3/4													
A8	Aluminium housing F18, IP66/IP67, NEMA 4X, thread G1/2													
C2	Polyester housing F16, IP66/IP67, NEMA 4X, cable gland M20													
P4	Polyester housing F16, IP66/IP67, NEMA 4X, thread G1/2A													
Q3	Polyester housing F16, IP66/IP67, NEMA 4X, thread NPT1/2													
(3)	Electrical output													
E5	FEM22, 3-wire, PNP, 10 V DC to 45 V DC													
WA	FEM24, relay, DPDT, 19 V AC to 253 V AC, 19 V DC to 55 V DC													


Type Code	
A	Additional equipment
A	Basic version
(4)	Approval
NA	Version for non-explosion-hazardous area
EX	ATEX II 1/2D Ex ta/tb IIIC T135°C Da/Db
CU	CSA General Purpose, CSA C US
IK	IECEx Ex ta/tb IIIC T135°C Da/Db

Connection

Electronic insert FEM22 (E5)

Three-wire DC connection

- preferred in conjunction with programmable logic controllers (PLC), DI modules as per EN 61131-2
- positive signal at electronics switch output (PNP)
- Output blocked at level limit.

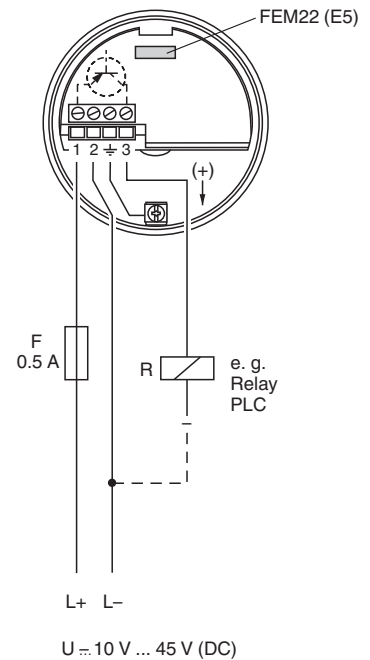


Electronic insert FEM24 (WA)

Universal current connection with relay output

- Power supply:
Please note the different voltage ranges for AC and DC.
 - When connecting a device with high inductance, provide a spark arrester to protect the relay contact.
- A fine-wire fuse (depending on the load connected) protects the relay contact in the event of a short-circuit. Both relay contacts switch simultaneously.
DPDT (double pole double throw)


* When jumpered, the relay output works with NPN logic.

** see "Connectable load"

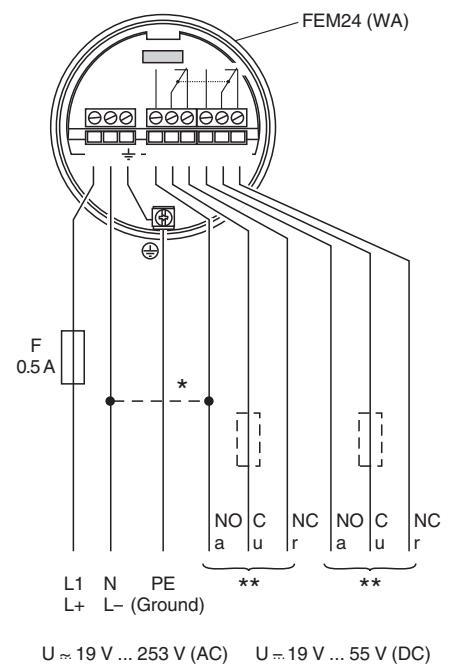

Mounting

Mounting position

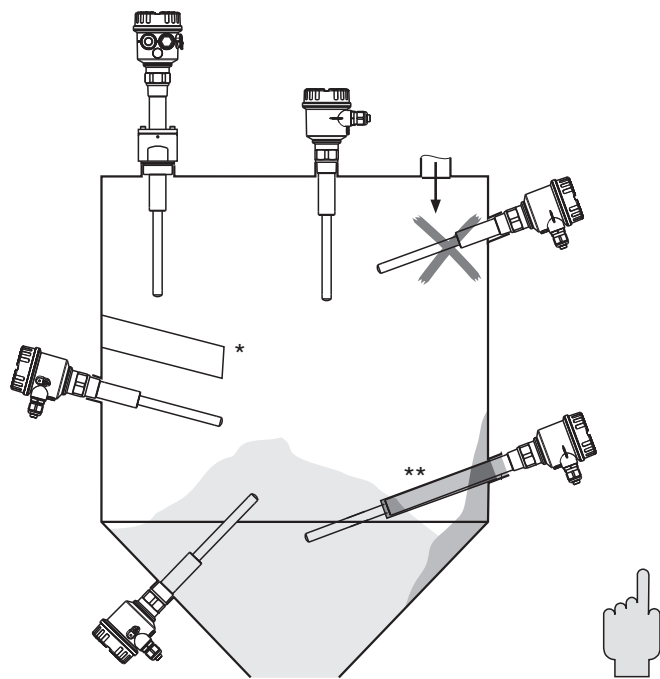

Horizontal installation/vertical installation
 * with protective cover (to be provided by customer)
 ** with protecting tube (to be provided by customer)

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>