

Управляемый уровненый радар LCR10

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884


Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>



Level Radar LCR10




- Device for level measurement in liquids
- Radar measuring device with Bluetooth® wireless technology
- Measuring range up to 12 m in fluids
- Process temperature up to 60 °C (140 °F)
- Process pressure up to 3 bar (43 psi)
- Accuracy up to ± 5 mm
- Commissioning, operation and maintenance via P+F Level app




Function

The device is suitable level measurement for liquids in storage tanks, open basins, pump shafts and canal systems. The device is a radar measuring device with Bluetooth® wireless technology. Due to the wireless remote access, the device can be used in places difficult to reach and in hazardous areas. The device can be configured and operated via the free iOS/Android app P+F Level. The device has a PVDF housing, which guarantees a long lifetime. The hermetically sealed wiring and fully potted electronics prevent water ingress and allow use under harsh ambient conditions.

Connection

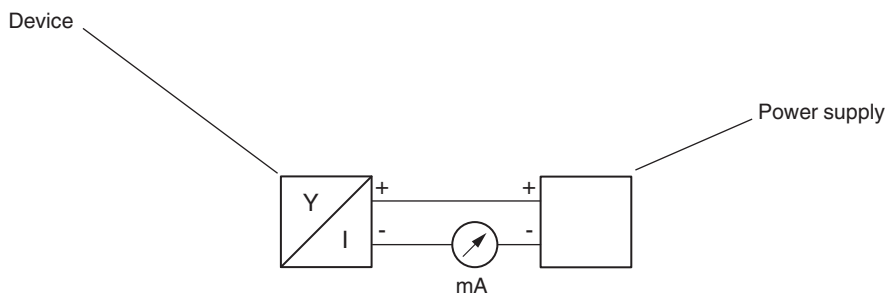

Dimensions

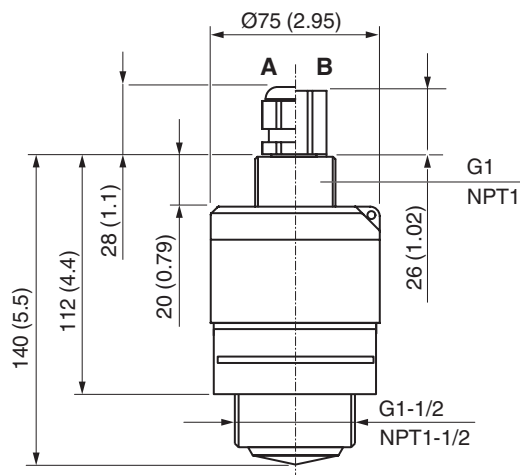

Technical Data

General specifications

Measuring method The device is a measuring system that functions according to the time-of-flight method. The distance from the reference point (process connection of the measuring device) to the product surface is measured.

Construction type compact device

Series LCR

Supply

Rated voltage U_r 10.5 ... 30 V DC

Current consumption input current : max. 25 mA
start-up current : max. 3.6 mA

Power consumption input power : max. 675 mW

Electrical specifications

Surge protection integrated

Start-up time first stable measured value after 20 s at 24 V DC

Interface

Interface type Bluetooth

Detection range max. 25 m

Configuration commissioning, operation and maintenance via P+F Level app
- can be activated/deactivated
- password encryption

Communication encrypted

Input

Measured variable distance between reference point and product surface

Measurement range - device with 40 mm (1.5 inch) antenna: max. 8 m (26 foot)
- device with 40 mm (1.5 inch) antenna and flooding protection tube (accessory):
max. 12 m (39 foot)

Operating frequency approx. 26 GHz , K-Band

Transmitter radiated power mean power density in the direction of the beam
- at a distance of 1 m (3.3 foot): < 12 nW/cm²
- at a distance of 5 m (16 foot): < 0.4 nW/cm²

Output

Output signal 4 ... 20 mA , measured value output and power supply

Signal on alarm current output: 22.5 mA (in accordance with NAMUR recommendation NE 43)
P+F Level (app)
- status signal (as per NAMUR Recommendation NE 107)
- plain text display with remedial action

Directive conformity

Electromagnetic compatibility

Directive 2014/30/EU EN 61326-1:2013 (industrial locations)

Low voltage

Directive 2014/35/EU EN 61010-1:2010

Conformity

Electromagnetic compatibility NE 21

Degree of protection IEC 60529:2001

Vibration resistance DIN EN 60068-2-64 / IEC 60068-2-64

Climate class DIN EN 60068-2-38/IEC 68-2-38

Bluetooth IEEE 802.15.1

Measurement accuracy

Accuracy up to ± 5 mm

Operating conditions

Process conditions

Process temperature -40 ... 60 °C (-40 ... 140 °F)

Process pressure relative pressure : -1 ... 3 bar (-14.5 ... 43.5 psi)
absolute pressure : < 4 bar (58 psi)

State of aggregation liquid


Dielectric constant 4 ... 10 , e. g. concentrated acid, organic solvents, ester, aniline, alcohol, acetone, ...
> 10 , e.g. conductive liquids, aqueous solutions, diluted acids and bases

Ambient conditions

Technical Data

Ambient temperature		-40 ... 60 °C (-40 ... 140 °F)
Storage temperature		-40 ... 80 °C (-40 ... 176 °F)
Vibration resistance		20 ... 2000 Hz, 1 (m/s²)²/Hz
Mechanical specifications		
Degree of protection		IP68, NEMA 6P (24 hours in water 1.83 m (6 ft) deep) IP66, NEMA 4X
Connection		cable 2 x 0,75 mm²
Material		sensor housing: PVDF seal: EPDM back side process connection: PVDF cable gland: PA conduit adapter: CuZn nickel-plated O-ring: EPDM counter nut: PA6.6 design ring: PBT-PC front side process connection: PVDF cable: PVC
Cable		
Length	L	10 m
Mass		approx. 3 kg
Dimensions		Ø75 x 140 mm
Process connection		Back side: thread ISO228 G1, ASME MNPT1 Front side: thread ISO228 G1-1/2, ASME MNPT1-1/2
Certificates and approvals		
Telecommunications		radio license FCC
General information		
Supplementary documentation		technical information (TI) manuals, brief instructions (BA, KA)
Accessories		
Designation		see technical information (TI)

Assembly

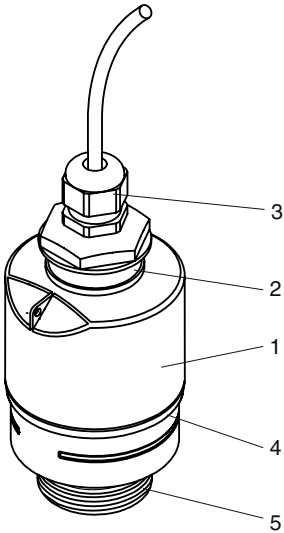

Device with 40 mm antenna
1 Sensor housing
2 Process connection rear side
3 Cable gland
4 Design ring
5 Process connection front side

Type Code

This overview does not mark options which are mutually exclusive.

L	C	R	1	0	-	(1)	-	(2)	(3)	(4)	-	(5)	-	(6)	(7)
----------	----------	----------	----------	----------	----------	------------	----------	------------	------------	------------	----------	------------	----------	------------	------------

LCR10	Device
LCR10	Level radar

(1)	Antenna, maximum measuring range
1	40 mm/1-1/2 inch, -40 to 60 °C (-40 to 140 °F), measuring range up to 8 m in liquids
X	Special version

(2)	Process connection rear side, material
G31	Thread ISO228 G1, PVDF
N31	Thread ASME MNPT1, PVDF, FNPT1/2 conduit
XXX	Special version

(3)	Process connection front side, material
D	Thread ASME MNPT1-1/2, PVDF
5	Thread ISO228 G1-1/2, PVDF
X	Special version

(4)	Cable length
2	10 m/32 foot
9	Special version

(5)	Power supply, output, operation
IQ	2-wire, 4 to 20 mA HART, HART/Bluetooth (App) configuration
XX	Special version

(6)	Approval
NA	Version for non-explosion-hazardous area
CG	CSA C/US General Purpose
XX	Special version

Additional Options

(7)	Accessory enclosed
R7	Flooding protection tube, PBT-PC metallized, suitable for 40 mm/1-1/2 inch antenna with process connection front side G1-1/2, measuring range up to 12 m in liquids

(7)	Marking
Z1	Tagging (TAG), see additional specification

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>