

Магнитные погружные зонды LML-S

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59


Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>



Magnetic Immersion Probe for Limit Value Detection

LML-S



- Sensor for limit value detection in liquids
- Media contacting parts of stainless steel
- Mounting without removing the float (G5 and G6)



Function

The device is a sensor for limit value detection in liquids.


A ring magnet integrated in the float activates the contacts inside the probe tube via its magnetic field. If the probe strays outside the range of the mechanical contact, it reverts to the output status.

The skipping of switching points caused by abrupt level changes can be avoided using snap-on set collars on the probe tube. The same set collars are also used for latching contact operation.


Connection

Change-over contact


1 contact




3 contacts



2 contacts



Dimensions

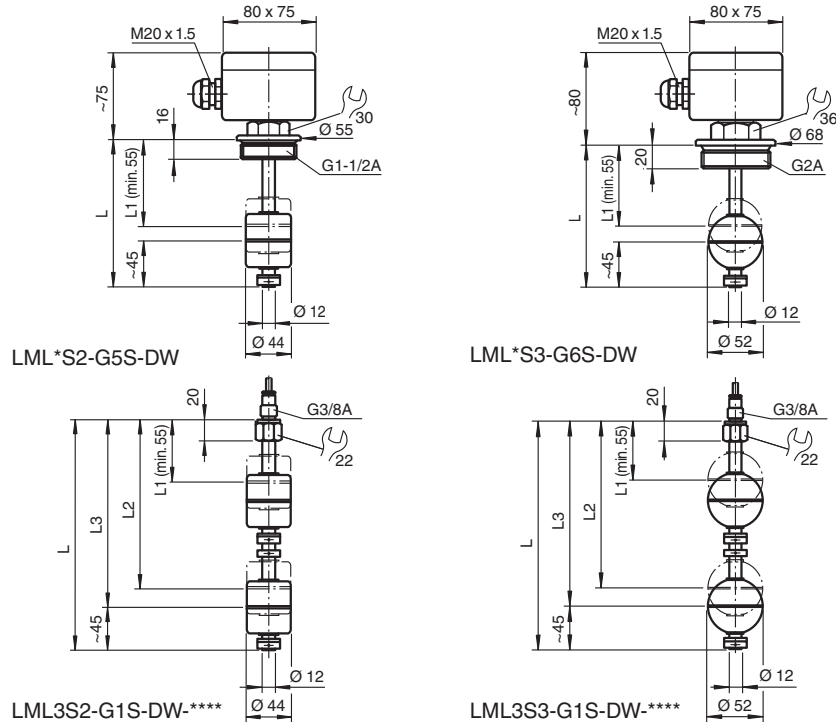

Technical Data

General specifications

Function principle	ring magnet as switching element in the float, reed contact, change-over contact number of contacts: - version LML1: 1 contact - version LML2: 2 contacts - version LML3: 3 contacts	
--------------------	--	--

Series	LML-S
--------	-------

Supply

Rated voltage	U_r	250 V AC/DC
Current consumption		1 A
Power consumption		40 VA

Output

Connection	This device may be used with any sequential circuit, as long as the circuit can support the electrical circuit values of the switching elements.
------------	--

Directive conformity

Low voltage	
Directive 2014/35/EU	EN 61010-1:2010

Conformity

Degree of protection	IEC 60529:2000
----------------------	----------------

Operating conditions

Installation conditions	
Switching point	position according to specification
Process conditions	
Process temperature	version LML: -30 ... 150 °C (-22 ... 302 °F) version LML-PVC1: -10 ... 80 °C (14 ... 176 °F)
Process pressure (static pressure)	≤ 25 bar (362.6 psi)
Density	version S2: ≥ 0.8 g/cm ³ version S3: ≥ 0.7 g/cm ³

Ambient conditions

Ambient temperature	-20 ... 70 °C (-4 ... 158 °F)
---------------------	-------------------------------

Mechanical specifications

Degree of protection	IP66 / IP68
----------------------	-------------

Technical Data

Connection	version LML: terminal box, max. 9 terminals version LML-PVC1: connection cable 1 m (3.3 ft), 0.75 mm ²	
Material		float, guide tube, process connection: stainless steel 1.4571/316Ti connection cable: PVC terminal box: aluminum die-casting
Dimensions		float: - version S2: cylinder Ø44 mm x 52 mm - version S3: ball Ø52 mm guide tube: Ø12 mm, max. length 3000 mm terminal box: 80 x 75 x 55 mm
Process connection		thread G3/8A, G1-1/2A, G2A to DIN/ISO 228/1
General information		
Accessories		
Designation		- LML-Z11 set collar, 1.4571/316Ti - LML-FS2 float, cylinder, Ø44 mm x 52 mm, 1.4571/316Ti - LML-FS3 float, ball, Ø52 mm, 1.4571/316Ti

Type Code

This overview does not mark options which are mutually exclusive.

L	M	L	(1)	S	(2)	-	(3)	S	-	D	W	-	P	V	C	1	/	L
---	---	---	-----	---	-----	---	-----	---	---	---	---	---	---	---	---	---	---	---

LML	Device
LML	Magnetic immersion probe for limit value detection

(1)	Number of contacts
1	1 contact
2	2 contacts
3	3 contacts

S	Guide tube material
S	Stainless steel 1.4571/316Ti

(2)	Float
2	Cylinder, Ø44 mm x 52 mm, stainless steel 1.4571/316Ti
3	Ball, Ø52 mm, stainless steel 1.4571/316Ti

(3)	Process connection
G1	Thread G3/8, DIN/ISO 228/1, with PVC cable, 1 m
G5	Thread G1-1/2A, DIN/ISO 228/1
G6	Thread G2A, DIN/ISO 228/1

S	Process connection material
S	Stainless steel 1.4571/316Ti

DW	Electrical output
DW	Change-over contact, directly

PVC1	Additional options
PVC1	PVC cable, 1 m, for G1 process connection

L	Guide tube length
Length	Specified length, max. 3000 mm Specify the location of the contacts when placing your order. The tube length L will be defined corresponding to the lowest contact location. - Minimum distance between L1 and L2: 20 mm If you are using 3 contacts, observe the following distances: - Minimum distance between L1 and L2: 80 mm - Minimum distance between L2 and L3: 20 mm

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>