

Клеммные и распределительные коробки (Ex d IIB+H2) из алюминия EJB

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>



Solutions Ex d IIB or CID1 / CIID1 based on Aluminum Enclosures

EJB*

- Copper-free aluminum enclosure
- Suitable for operation in Zone 1, Zone 2, Zone 21 and Zone 22
- Suitable for operation in Class I, II Division 1
- Ex d and Ex tb certified
- Gas group IIB+H₂
- Degree of protection IP66 or IP66 / IP67, NEMA Type 4X
- Various enclosure size and design variants
- Customizable configuration of operators, cable entry quantities and cable gland types as per specification
- Integration of electrical components and operating elements as per customer specification
- Choice of viewing windows for monitoring instruments

Solutions Ex d IIB or CID1 / CIID1 based on Aluminum Enclosures




Function

The enclosure series EJB forms the optimal basis for the application-specific configuration of terminal boxes, control stations as well as control and distribution panels.

The enclosures are certified Ex d IIB+H₂ and Ex tb as well as "explosion-proof". They are available in many sizes, a wide range of operating elements and monitoring functions can be integrated. They are manufactured from copper-free aluminum with increased corrosion resistance. This durability as well as the flexible customization options cover the requirements of many industries including offshore and marine applications. A choice of windows allows viewing of integrated monitoring functions. Electrical components can be integrated as per customer specification.

Dimensions

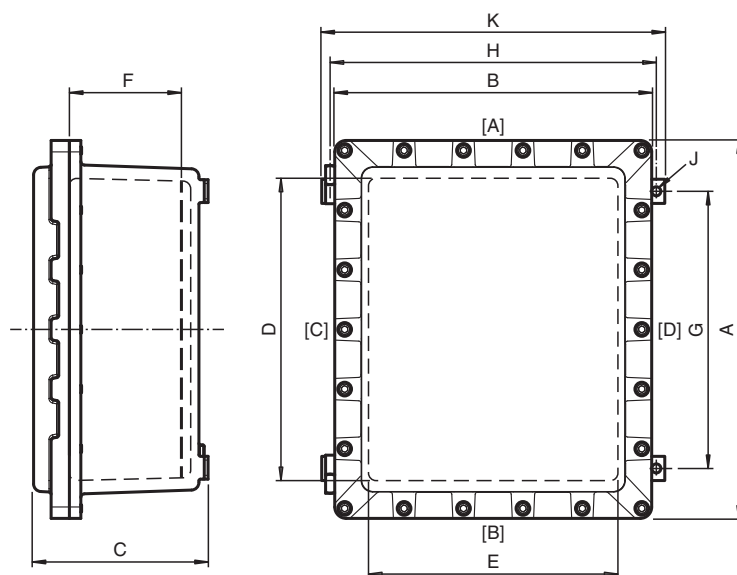

Dimensions

Dimension values see data table.

Real values might differ slightly due to manufacturing tolerances.

Dimensions are valid for standard enclosures and IP66 variants only.

Image and drawing are generic for this device type and may deviate from the specific variant.

Legend	
A	Height
B	Width
C	Depth
D	Internal height
E	Internal width
F	Internal depth to surface mounting plate
G	Mounting holes distance, vertical
H	Mounting holes distance, horizontal
J	Mounting holes diameter
K	Maximum external dimension of mounting brackets
[A] ... [D]	Cable entry faces

Technical Data

Electrical specifications

Operating voltage 1500 V DC / 1000 V AC max. for ATEX / IECEx
600 V AC / DC max. for North American approvals

Operating current 1600 A max.

Mechanical specifications

Thread type metric ISO pitch 1.5 mm or NPT ANSI ASME B1.20.1

Enclosure cover detachable , optional hinges

Cover fixing stainless steel socket cap head screws

Screws see data table

Material of screws stainless steel

Yield stress min. 450 N/mm² for ATEX / IECEx , 100,000 PSI for North American approvals

Cover seal none, O-ring for IP66/67

Flamepath grease Greasil MS4 or NEVER SEEZ Marine Grade

Degree of protection IP66 (IP66/67 with O-ring) , NEMA Type 4, 4X, 7, 9

Cable entry see data table

Material

Enclosure aluminum alloy

Glass thermo-resistant tempered glass

Finish epoxy coated RAL 7005 (grey)

O-Ring silicone

Mass see data table
valid for empty enclosure, will increase according to integrated components

Dimensions see data table
values might differ slightly due to casting and manufacturing tolerances
dimensions are valid for standard enclosures and IP66 variants only

Mounting see data table

Grounding M6 external grounding points

Ambient conditions

Ambient temperature -60 ... 60 °C (-76 ... 140 °F)
depending on integrated components

Data for application in connection with hazardous areas

EU-type examination certificate INERIS 14 ATEX 0022X
INERIS 14 ATEX 9010U

Technical Data

Marking	II 2 GD Ex db IIB+H ₂ T* Gb Ex tb IIIC T** °C Db T6/T85 °C T5/T100 °C T4/T135 °C T3/T200 °C depending on configuration, ambient temperature and built-in power loss	
Maximum power dissipation		see data table maximum power dissipation at T4/+40 °C enclosure without window
International approvals		
UL approval		
Approved for		Class I, Division 1, Groups B, C, D Class II, Division 1, Groups E, F, G Type 4, 4X, 7, 9
cULus		Empty enclosure E482035, UL 50E, UL 1203, CSA C22.2, No. 25, 30
cETLus		Control panels E5003368
Ambient temperature		-25 ... 60 °C (-13 ... 140 °F)
IECEx approval		IECEx INE 14.0029X IECEx INE 14.0028U
UKCA approval		CML 21 UKEX 1424X CML 21 UKEX 1425U
ECAS approval		23-10-87483/E23-09-089610
CCC approval		2020322303002546
Further approvals		available on request
Conformity		
Degree of protection		EN60529 and UL 50 / UL 50E
CE marking		0080 or 0102, see type label
General information		
Ordering information		This solution will be delivered completely configured and assembled ready for use. For configuration details please contact Customer Service.
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable.

Type Code

1	2	3		4		5		6		7	8
EJB	*	**	.	**	.	*	.	**	-	*	****
EJB		17Q	.	W1	.	D	.	CP	-	Y	0001

Example: EJB17Q.W1.D.CP-Y0001

Control panel EJB size 17Q in aluminum, rectangular window type 1, without intrinsically safe circuits

1	Enclosure type
EJB	enclosure Ex d IIB+H ₂
2	Material
	copper-free aluminum
3	Enclosure size
0 ... 20A	see dimensions data table
4	Window
	no window
W ...	rectangular window with type indication
WG ...	circular window with type indication
5	Electrical circuits
D	without intrinsically safe circuits
I	intrinsically safe circuits integrated
6	Type of application
U	empty enclosure
T	terminal box ATEX / IECEx

Type Code

6	Type of application
TD1	terminal box UL Class 1, Division 1 / Class 2, Division 1
CP	control panel ATEX / IECEx
CPD1	control panel UL Class 1, Division 1 / Class 2, Division 1
CS	control station ATEX / IECEx
CSD1	control station UL Class 1, Division 1 / Class 2, Division 1
DB	distribution board
DMT	electronic earthing system
MS	motor starter
PS	power switching
RIO	remote I/O field unit
IFS	interface solution
FJB	fieldbus solution
OS	optical solution
Q40	engineered solution per customer specification (Q40)
7	Variant
S	standard product
C	configured Product
Y	engineered Product
8	Variant number
xxxx	consecutive number

Dimensions and Enclosure Details

Type	External dimensions [mm]				Internal dimensions [mm]			Mounting [mm]			Mass [kg]	Cover screws		North American approval	Max. power dissipation at T4/+40 °C [W]
	A	B	C	K	D	E	F	G	H	J		Mx	qty.		
EJB0*	200	136	150	128	140	75	115	133	108	8	3.8	M6	6	x	51
EJB2A*	220	220	159	226	162	162	130	157	206	8	6.4	M6	8	-	104
EJB4A*	265	225	180	226	200	160	136	188	206	8	8.5	M8	10	x	125
EJB6A*	332	232	172	216	250	150	133	230	196	8	9.8	M8	10	-	139
EJB8*	390	290	182	270	300	200	131	282	250	10	15.7	M8	14	-	192
EJB8A*	390	290	204	270	300	200	153	282	250	10	16.6	M8	14	x	211
EJB8B*	390	290	237	270	300	200	186	282	250	10	17.9	M8	14	x	236
EJB9A*	412	242	186	226	330	160	139	312	206	8	14.2	M8	14	-	185
EJB9B*	412	242	258	226	330	160	211	312	206	8	16.8	M8	14	-	238
EJB10A*	468	358	215	350	370	260	165	345	320	9	25.1	M8	16	x	305
EJB10B*	468	358	265	350	370	260	215	345	320	9	28.7	M8	16	x	353
EJB11A*	498	418	225	415	400	320	173	363	385	10	32.0	M10	22	x	383
EJB11B*	498	418	276	415	400	320	218	363	385	10	37.0	M10	22	x	432
EJB15*	580	430	226	460	500	350	172	460	430	11	40.8	M10	20	-	481
EJB15A*	580	430	282	460	500	350	221	460	430	11	52.0	M10	20	x	540
EJB17*	676	503	269	494	570	397	198	538	464	11	56.0	M10	22	-	745
EJB17A*	676	503	389	494	570	397	317	538	464	11	67.0	M10	22	-	746
EJB17Q*	630	630	368	613	500	500	278	453	583	11	94.0	M12	24	x	593
EJB18A*	750	537	303	535	640	427	213	509	505	11	85.0	M12	24	x	707
EJB18B*	750	537	408	535	640	427	318	509	505	11	100.0	M12	24	x	864
EJB20*	935	685	353	670	805	555	247	668	630	14	167.0	M16	32	-	1616
EJB20A*	935	685	500	670	805	555	393	668	630	14	195.0	M16	32	-	1616

Mass is valid for empty enclosure, it will increase according to integrated components and cable glands

Dimensions are valid for standard enclosures and IP66 variants only

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>