

Корпуса приборов (Ex d IIC) из алюминия

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>

SMH

Ex d IIC



Instrument housing range

Enclosures with threaded cover with circular port-hole suitable to contain instruments

SEB

Ex d IIC



Electronic card housing range

Boxes with threaded cover suitable to contain electronic devices

SK

Ex d IIC



Instrument housing range for thermocouple/RTD

Boxes with threaded cover suitable to contain thermocouples and RTD

SO

Ex d IIC



Instrument housing range with port-hole

Boxes with threaded cover with circular port-hole suitable to contain signaling/visualization equipment

SO-E

Ex d IIC



Instrument housing range with extension and port-hole

Boxes with threaded cover with extension and circular port-hole suitable to contain signaling/visualization equipment

Description:

The SMH instrument housing is made of aluminium alloy and has a cylindrical body and a screwed cover with circular port-hole.

Application:

The SMH instrument housing is suitable to contain analogue and digital measurement instruments such as voltmeters, ammeters, speed indicators.

Material:

Body and cover: copper free aluminium alloy.
 Port-hole: thermo-resistant tempered glass.
 Screws: stainless steel.

Certification characteristics:

Type of Protection: II 2GD Ex d IIC / Ex tD A21
 II 2GD Ex e II / Ex tD A21.
 Class of Temperature: T6/T85 °C,
 T5/T100 °C (only Ex e version).
 Protection Degree: IP66 / IP67*.
 Certificate: INERIS 01ATEX0023.
 Ambient Temperature: -50 / +60 °C (-20 / +40 °C).
 Zones: 1 – 21 – 2 – 22.

Threads:

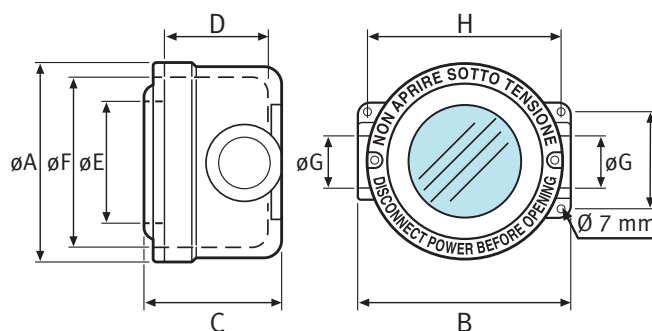
NPT (ANSI B1.20.1).
 Metric x 1.5 (ISO 261).

Inhibiting treatments:

External standard epoxy painting RAL 7005.

On request:

Stainless steel version AISI 304 or AISI 316L.
 Support for instrument 72 x 72 (K72).
 Instrument meter.
 Version with extension (SMH-E).
 *IP67 protection with o-ring.
 Other epoxy painting colours different from the standards.
 Special inhibiting treatment.
 Cable glands for armoured or non armoured cable.

Drawing SMH**Legend:**

Ø A - Maximum external diameter.
 B - Maximum external dimension.
 C - Maximum external dimension with cover.
 D - Internal depth.
 Ø E - Port-hole diameter.
 Ø F - Internal diameter.
 Ø G - Cable entry.
 H - Fixing holes wheel base.
 I - Fixing holes wheel base.

Grounding:

Internal and external: M5 grounding point.

SMH - Data Table

Dimensions [mm] and approx. Weight [Kg]

Type	Dimensions						Entries (NPT)	Fixing		Weight
	Ø A	B	C	D	Ø E	Ø F	Ø G	H	I	
SMH	136	150	117	98	79	110	2 x 3/4"	130	65	1,6
SMH-E	136	150	221	202	79	110	2 x 3/4"	130	65	2,3

Note: - dimensions can slightly differ due to casting model tolerances.

Description:

The SEB boxes are made of aluminium alloy and circular shaped, they have a screwed blind cover and have different configuration of cable entry.

Application:

The SEB instrument housing is suitable to contain electronic devices to measure, control and elaborate signals of physical parameters.

Materials:

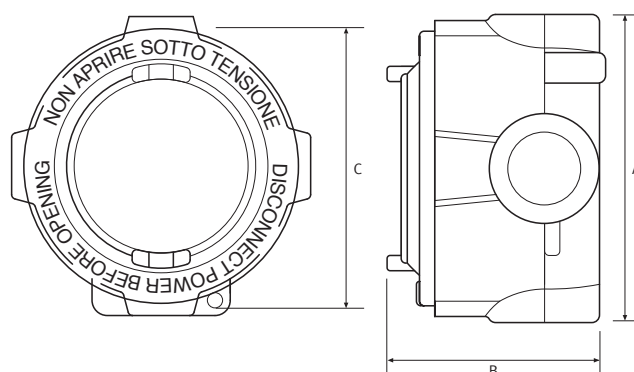
Body and cover: copper free aluminium alloy.
Screws: stainless steel.

Certification characteristics:

Type of Protection: II 2GD Ex d IIC / Ex tD A21
II 2GD Ex e II / Ex tD A21.
Class of Temperature: T6/T85 °C,
T5/T100 °C (only Ex e version).
Protection Degree: IP66 / IP67*.
Certificate: INERIS 01ATEX0023.
Ambient Temperature: -50 / +60 °C (-20 / +40 °C).
Zones: 1 – 21 – 2 – 22.

Threads:

NPT (ANSI B1.20.1).
Metric x 1.5 (ISO 261).

Drawing SEB**Legend:**

A - Maximum external dimension.
B - Maximum external dimension with cover.
Ø C - External diameter.

Grounding:

Internal and external: M5 grounding point.

On request:

Stainless steel version AISI 304 or AISI 316L.
*IP67 protection with o-ring.
Extension 76 mm.
Cover with port-hole.
Anti loosening cover.
Fixation brackets.
External epoxy painting.
Special inhibiting treatment.
Cable glands for armoured or non armoured cable.

SEB - Data Table

Dimensions [mm] and approx. Weight [Kg]

Type		Entries		Dimensions			Weight
		n°	Ø [NPT]	A	B	Ø C	
	SEB/B 16	2	1/2"	100	75	90	0,45
	SEB/B 26	2	3/4"	100	75	90	0,45
	SEB/C 16	2	1/2"	100	75	90	0,45
	SEB/C 26	2	3/4"	100	75	90	0,45
	SEB/D 16	3	1/2"	100	75	90	0,45
	SEB/D 26	3	3/4"	100	75	90	0,45
	SEB/L 16	2	1/2"	100	75	90	0,45
	SEB/L 26	2	3/4"	100	75	90	0,45
	SEB/M 16	3	1/2"	100	75	90	0,45
	SEB/M 26	3	3/4"	100	75	90	0,45
	SEB/T 16	3	1/2"	100	75	90	0,45
	SEB/T 26	3	3/4"	100	75	90	0,45
	SEB/W 16	4	1/2"	100	75	90	0,45
	SEB/W 26	4	3/4"	100	75	90	0,45
	SEB/X 16	4	1/2"	100	75	90	0,45
	SEB/X 26	4	3/4"	100	75	90	0,45
	SEB/J 16	5	1/2"	100	75	90	0,45
	SEB/J 26	5	3/4"	100	75	90	0,45

Note: - standard external grounding point close to the lower cable entry.

Description:

The SK instrument housing is made of aluminium alloy and circular shaped. They have a screwed blind cover and have different configuration for cable entry.

Application:

The SK instrument housing is suitable to contain thermocouples/RTDs (Resistance Temperature Detectors) or other thermometer elements, electronic transmitters or equivalent devices.

Materials:

Body and cover: copper free aluminium alloy.

Screws: stainless steel.

Certification characteristics:

Type of Protection: II 2GD Ex d IIC / Ex tD A21

II 2GD Ex e II / Ex tD A21.

Class of Temperature: T6/T85 °C,
T5/T100 °C (only Ex e version).

Protection Degree: IP66 / IP67*.

Certificate: INERIS 01ATEX0023.

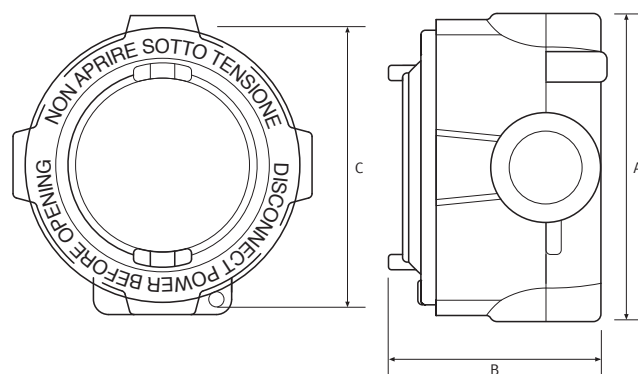
Ambient Temperature: -50 / +60 °C (-20 / +40 °C).

Zones: 1 – 21 – 2 – 22.

Threads:

NPT (ANSI B1.20.1).

Metric x 1.5 (ISO 261).

Drawing SK**Legend:**

- A - Maximum external dimension.
- B - Maximum external dimension with cover.
- Ø C - External diameter.

Grounding:

Internal and external: M5 grounding point.

On request:

Stainless steel version AISI 304 or AISI 316L.

Thermocouple.

*IP67 protection with o-ring.

Cover with port-hole.

Anti loosening cover.

Fixation brackets.

External epoxy painting.

Special inhibiting treatment.

Cable glands for armoured or non armoured cable.

SK - Data Table

Dimensions [mm] and approx. Weight [Kg]

Type		Entries		Dimensions			Weight
		n°	Ø [NPT]	A	B	Ø C	
	SK/B 16	2	1/2"	100	75	90	0,45
	SK/B 26	2	3/4"	100	75	90	0,45
	SK/D 16	3	1/2"	100	75	90	0,45
	SK/D 26	3	3/4"	100	75	90	0,45
	SK/M 16	3	1/2"	100	75	90	0,45
	SK/M 26	3	3/4"	100	75	90	0,45
	SK/W 16	4	1/2"	100	75	90	0,45
	SK/W 26	4	3/4"	100	75	90	0,45
	SK/J 16	5	1/2"	100	75	90	0,45
	SK/J 26	5	3/4"	100	75	90	0,45

Note: - standard external grounding point close to the lower cable entry.

Description:

The SO instrument housing is made of aluminium alloy and circular shaped. It has a screwed cover with circular port-hole and has different configuration for cable entry. Please refer to the product SO-E showing this enclosure with extension.

Application:

The SO instrument housing is suitable to contain signalling/ visualization equipment.

Material:

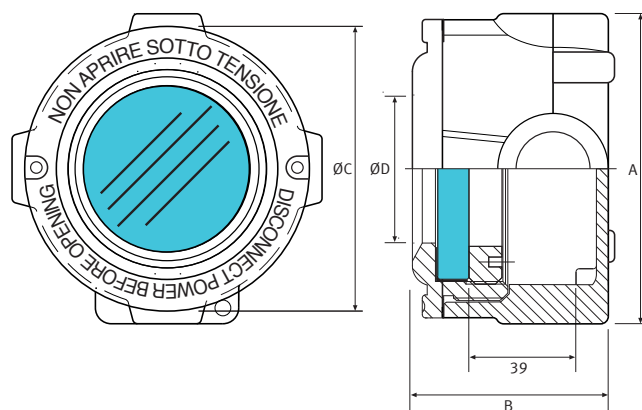
Body and cover: copper free aluminium alloy.
 Port-hole: thermo-resistant tempered glass.
 Screws: stainless steel.

Certification characteristics:

Type of Protection: II 2GD Ex d IIC / Ex tD A21
 II 2GD Ex e II / Ex tD A21.
 Class of Temperature: T6 / T85 °C,
 T5 / T100 °C (only Ex e version).
 Protection Degree: IP66 / IP67*.
 Certificate: INERIS 01ATEX0023.
 Ambient Temperature: -50 / +60 °C (-20 / +40 °C).
 Zones: 1 – 21 – 2 – 22.

Threads:

NPT (ANSI B1.20.1).
 Metric x 1.5 (ISO 261).

Drawing SO**Legend:**

A - Maximum external dimension.
 B - Maximum external dimension with cover.
 Ø C - External diameter.
 Ø D - Port-hole diameter.

Drawing dimensions [mm]

Grounding:

Internal and external: M5 grounding point.

On request:

Stainless steel version AISI 304 or AISI316L.
 *IP67 protection with o-ring.
 Anti loosening cover.
 Fixation brackets.
 External epoxy painting.
 Special inhibiting treatment.
 Cable glands for armoured or non armoured cable.

SO - Data Table

Dimensions [mm] and approx. Weight [Kg]

Type		Entries		Dimensions				Weight
		n°	Ø [NPT]	A	B	Ø C	Ø D	
	SO/A 16	1	1/2"	100	67	90	49	0,5
	SO/A 26	1	3/4"	100	67	90	49	0,5
	SO/B 16	2	1/2"	100	67	90	49	0,5
	SO/B 26	2	3/4"	100	67	90	49	0,5
	SO/C 16	2	1/2"	100	67	90	49	0,5
	SO/C 26	2	3/4"	100	67	90	49	0,5
	SO/D 16	3	1/2"	100	67	90	49	0,5
	SO/D 26	3	3/4"	100	67	90	49	0,5
	SO/L 16	2	1/2"	100	67	90	49	0,5
	SO/L 26	2	3/4"	100	67	90	49	0,5
	SO/M 16	3	1/2"	100	67	90	49	0,5
	SO/M 26	3	3/4"	100	67	90	49	0,5
	SO/T 16	3	1/2"	100	67	90	49	0,5
	SO/T 26	3	3/4"	100	67	90	49	0,5
	SO/W 16	4	1/2"	100	67	90	49	0,5
	SO/W 26	4	3/4"	100	67	90	49	0,5

Note: - standard external grounding point close to the lower cable entry.

Description:

The SO-E instrument housing is made of aluminium alloy and circular shaped. It has a screwed cover with circular port-hole, extension and has different configuration for cable entry.

Application:

The SO-E instrument housing is suitable to contain signalling / visualization equipment.

Material:

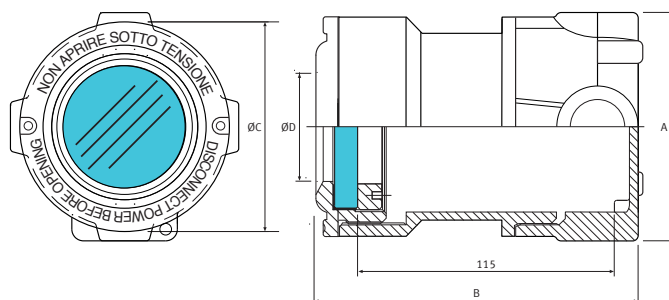
Body and cover: copper free aluminium alloy.
 Port-hole: thermo-resistant tempered glass.
 Screws: stainless steel.

Certification characteristics:

Type of Protection: II 2GD Ex d IIC / Ex tD A21
 II 2GD Ex e II / Ex tD A21.
 Class of Temperature: T6 / T85 °C,
 T5 / T100 °C (only Ex e version).
 T4 / T135 °C.
 Protection Degree: IP66 / IP67*.
 Certificate: INERIS 01ATEX0023.
 Ambient Temperature: -50 / +60 °C (-20 / +40 °C).
 Zones: 1 – 21 – 2 – 22.

Threads:

NPT (ANSI B1.20.1).
 Metric x 1.5 (ISO 261).

Drawing SO-E**Legend:**

- A - Maximum external dimension.
- B - Maximum external dimension with cover.
- Ø C - External diameter.
- Ø D - Port-hole diameter.

Drawing dimensions [mm].

Grounding:

Internal and external: M5 grounding point.

On request:

- *IP67 protection with o-ring.
- Anti loosening cover.
- Fixation brackets.
- External epoxy painting.
- Special inhibiting treatment.
- Cable glands for armoured or non armoured cable.

SO-E - Data Table

Dimensions [mm] and approx. Weight [Kg]

Type		Entries		Dimensions				Weight
		n°	Ø [NPT]	A	B	Ø C	Ø D	
	SO-E/A 16	1	1/2"	100	144	90	49	0,85
	SO-E/A 26	1	3/4"	100	144	90	49	0,85
	SO-E/B 16	2	1/2"	100	144	90	49	0,85
	SO-E/B 26	2	3/4"	100	144	90	49	0,85
	SO-E/C 16	2	1/2"	100	144	90	49	0,85
	SO-E/C 26	2	3/4"	100	144	90	49	0,85
	SO-E/D 16	3	1/2"	100	144	90	49	0,85
	SO-E/D 26	3	3/4"	100	144	90	49	0,85
	SO-E/L 16	2	1/2"	100	144	90	49	0,85
	SO-E/L 26	2	3/4"	100	144	90	49	0,85
	SO-E/M 16	3	1/2"	100	144	90	49	0,85
	SO-E/M 26	3	3/4"	100	144	90	49	0,85
	SO-E/T 16	3	1/2"	100	144	90	49	0,85
	SO-E/T 26	3	3/4"	100	144	90	49	0,85
	SO-E/W 16	4	1/2"	100	144	90	49	0,85
	SO-E/W 26	4	3/4"	100	144	90	49	0,85

Note: - standard external grounding point close to the lower cable entry.

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>