

Лазерные датчики профиля

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>



Laser light sensor VLE350-F280-B12-1100

- Height profile output
- Area image output
- Resolution 1280 x 960 pixel
- Intelligent exposure time control
- Laser class 1, eyesafe


Laser light sensor for profile matching; Resolution: 1280 x 960 Pixel; Measuring range: X = 40 ... 160 mm, Z = 60 ... 350 mm; Scan rate: 30 s-1; Ethernet TCP/IP interface



Function

The SmartRunner Explorer is based on the innovative SmartRunner technology and outputs both height profiles and area images. SmartRunner technology combines the light-sectioning method for acquiring height profiles with the acquisition of area images via the integrated area illumination. In the light section method, a laser line is projected onto an object. This is captured at a specific angle by a camera. A height profile is then created using the triangulation principle. This laser technology enables reliable height profile recording on different surfaces.

Dimensions

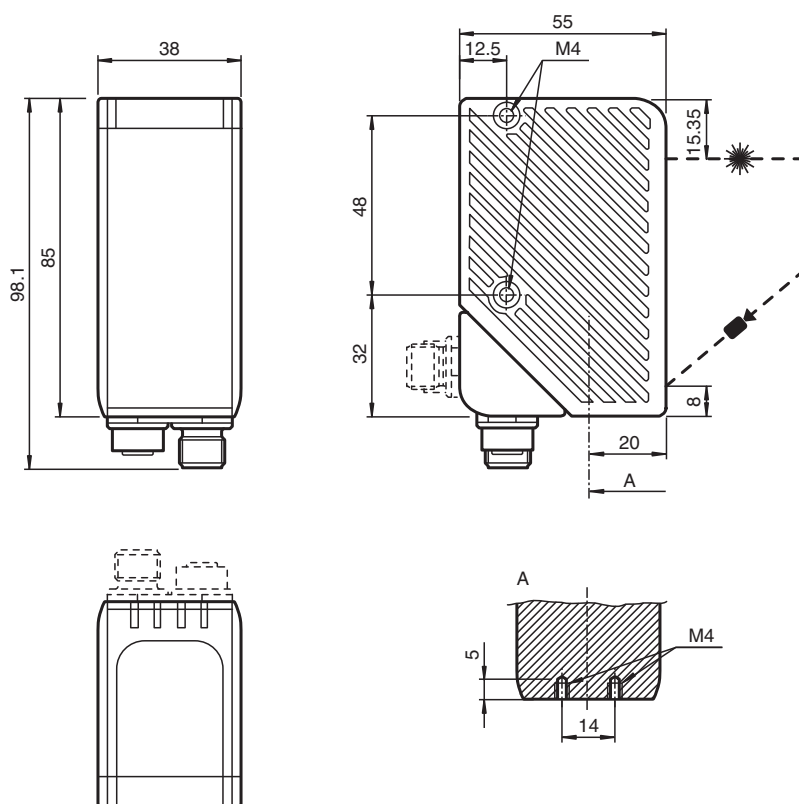

Technical Data

General specifications

Measuring range

X = 40 ... 160 mm ; Z = 60 ... 350 mm



Technical Data

Light source		laser diode
Light type		red laser + Integrated LED lightning red 650 nm
Laser nominal ratings		
Note		VISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS
Laser class		1
Wave length		Measuring laser: 660 nm
Pulse length		Measuring laser: 0.5 ms
Maximum optical power output		Measuring laser: 15 mW
Laser monitoring		The safety system switches off the laser when the laser current is too high
Scan rate		30 s ⁻¹
Resolution		X>0.075 mm; Z>0.1 mm at 60 mm distance X>0.12 mm; Z>0.6 mm at 200 distance X>0.25 mm; Z>1.3 mm at 350 distance
Nominal ratings		
Camera		
Number of pixels		1280 x 960 pixels
Functional safety related parameters		
MTTF _d		20 a
Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green
Diagnostics indicator		LED yellow / red
Function indicator		Trigger: LED yellow
Control elements		2 push-buttons
Electrical specifications		
Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 250 mA
Power consumption	P ₀	max. 6 W , Outputs without load
Interface		
Interface type		Ethernet
Protocol		TCP/IP
Transfer rate		100 MBit/s
Input		
Input voltage		24 V
Number/Type		External triggering
Switching threshold		low: < 2.5 V, high: > 8 V
Compliance with standards and directives		
Standard conformity		
Noise immunity		EN 61000-6-2:2005
Emitted interference		EN 61000-6-4:2007/A1:2011
Degree of protection		EN 60529
Shock and impact resistance		EN 60068-2-27:2009
Laser class		IEC 60825-1:2007
Approvals and certificates		
CCC approval		CCC approval / marking not required for products rated ≤36 V
Approvals		CE
Ambient conditions		
Operating temperature		-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)
Storage temperature		-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications		
Degree of protection		IP67


Technical Data

Connection	8-pin, M12 x 1 connector (supply + Inputs/Outputs) + 4-pin, M12x1 socket, D-coded (LAN) ; can be rotated 90° ; Grounding : Grounding clip for PCV system
Material	
Housing	PC/ABS
Optical face	Plastic pane
Mass	approx. 125 g
Tightening torque, fastening screws	max. 2 Nm
Dimensions	
Height	85 mm
Width	38 mm
Depth	55 mm
General information	
Note	Security Instructions: <ul style="list-style-type: none">- Read the operating instructions before attempting commissioning- Installation, connection and adjustments should only be undertaken by specialist personnel- Not a safety component in accordance with the EU Machinery Directive

Connection Assignment

			
Pin	Signal	Pin	Signal
1	IN Trigger	1	TX+ Ethernet
2	+UB	2	RX+ Ethernet
3	n.c.	3	TX- Ethernet
4	n.c.	4	RX- Ethernet
5	n.c.		
6	n.c.		
7	GND		
8	n.c.		


Assembly

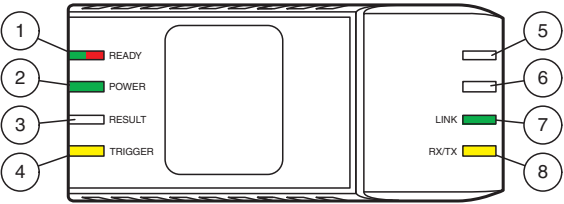

1	READY	green/red
2	POWER	green
3	RESULT	-
4	TRIGGER	yellow
5	n.c.	-
6	n.c.	-
7	LINK	green
8	RX/TX	yellow

Installation Conditions

Measuring range

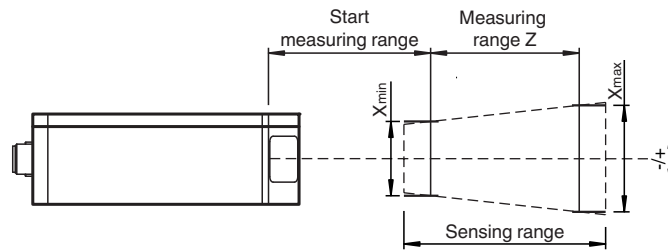

Safety Information



**LASERLICHT
LASER LIGHT**

**LASER KLASSE 1
CLASS 1 LASER PRODUCT**

Safety Information

Laser Class 1 Information

The irradiation can lead to irritation especially in a dark environment. Do not point at people!

Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.



Laser light sensor VLE350-F280-B12-1100

- Height profile output
- Area image output
- Resolution 1280 x 960 pixel
- Intelligent exposure time control
- Laser class 1, eyesafe


Laser light sensor for profile matching; Resolution: 1280 x 960 Pixel; Measuring range: X = 40 ... 160 mm, Z = 60 ... 350 mm; Scan rate: 30 s-1; Ethernet TCP/IP interface



Function

The SmartRunner Explorer is based on the innovative SmartRunner technology and outputs both height profiles and area images. SmartRunner technology combines the light-sectioning method for acquiring height profiles with the acquisition of area images via the integrated area illumination. In the light section method, a laser line is projected onto an object. This is captured at a specific angle by a camera. A height profile is then created using the triangulation principle. This laser technology enables reliable height profile recording on different surfaces.

Dimensions

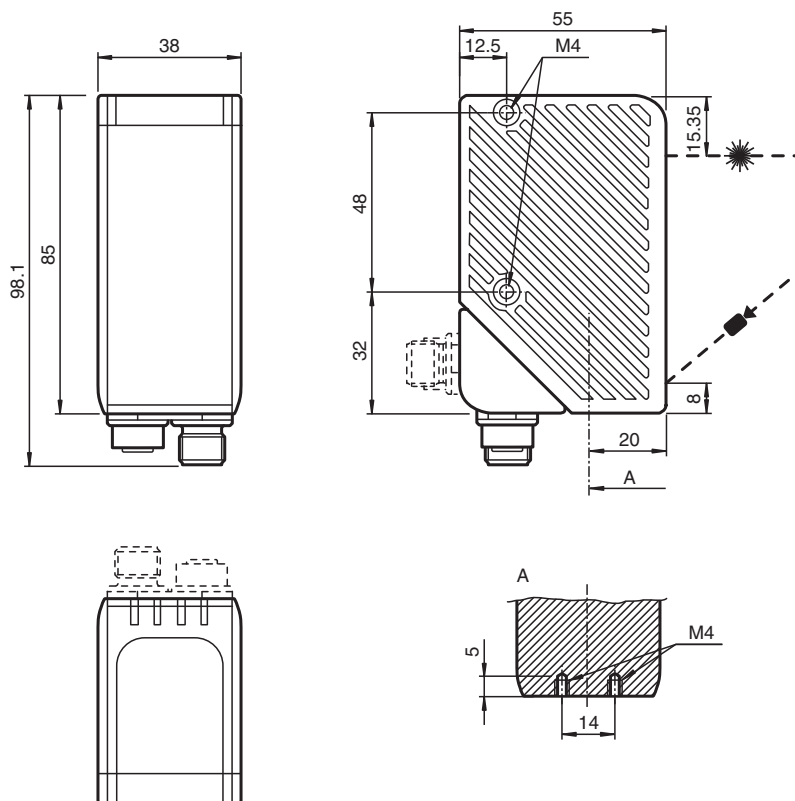

Technical Data

General specifications

Measuring range

X = 40 ... 160 mm ; Z = 60 ... 350 mm



Technical Data

Light source		laser diode
Light type		red laser + Integrated LED lightning red 650 nm
Laser nominal ratings		
Note		VISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS
Laser class		1
Wave length		Measuring laser: 660 nm
Pulse length		Measuring laser: 0.5 ms
Maximum optical power output		Measuring laser: 15 mW
Laser monitoring		The safety system switches off the laser when the laser current is too high
Scan rate		30 s ⁻¹
Resolution		X>0.075 mm; Z>0.1 mm at 60 mm distance X>0.12 mm; Z>0.6 mm at 200 distance X>0.25 mm; Z>1.3 mm at 350 distance
Nominal ratings		
Camera		
Number of pixels		1280 x 960 pixels
Functional safety related parameters		
MTTF _d		20 a
Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green
Diagnostics indicator		LED yellow / red
Function indicator		Trigger: LED yellow
Control elements		2 push-buttons
Electrical specifications		
Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 250 mA
Power consumption	P ₀	max. 6 W , Outputs without load
Interface		
Interface type		Ethernet
Protocol		TCP/IP
Transfer rate		100 MBit/s
Input		
Input voltage		24 V
Number/Type		External triggering
Switching threshold		low: < 2.5 V, high: > 8 V
Compliance with standards and directives		
Standard conformity		
Noise immunity		EN 61000-6-2:2005
Emitted interference		EN 61000-6-4:2007/A1:2011
Degree of protection		EN 60529
Shock and impact resistance		EN 60068-2-27:2009
Laser class		IEC 60825-1:2007
Approvals and certificates		
CCC approval		CCC approval / marking not required for products rated ≤36 V
Approvals		CE
Ambient conditions		
Operating temperature		-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)
Storage temperature		-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications		
Degree of protection		IP67


Technical Data

Connection	8-pin, M12 x 1 connector (supply + Inputs/Outputs) + 4-pin, M12x1 socket, D-coded (LAN) ; can be rotated 90° ; Grounding : Grounding clip for PCV system
Material	
Housing	PC/ABS
Optical face	Plastic pane
Mass	approx. 125 g
Tightening torque, fastening screws	max. 2 Nm
Dimensions	
Height	85 mm
Width	38 mm
Depth	55 mm
General information	
Note	Security Instructions: <ul style="list-style-type: none">- Read the operating instructions before attempting commissioning- Installation, connection and adjustments should only be undertaken by specialist personnel- Not a safety component in accordance with the EU Machinery Directive

Connection Assignment

			
Pin	Signal	Pin	Signal
1	IN Trigger	1	TX+ Ethernet
2	+UB	2	RX+ Ethernet
3	n.c.	3	TX- Ethernet
4	n.c.	4	RX- Ethernet
5	n.c.		
6	n.c.		
7	GND		
8	n.c.		


Assembly

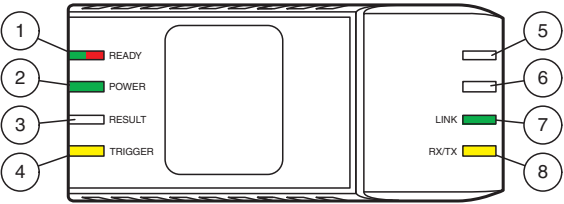

1	READY	green/red
2	POWER	green
3	RESULT	-
4	TRIGGER	yellow
5	n.c.	-
6	n.c.	-
7	LINK	green
8	RX/TX	yellow

Installation Conditions

Measuring range

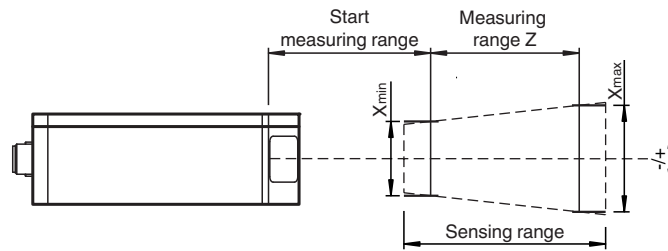

Safety Information



**LASERLICHT
LASER LIGHT**

**LASER KLASSE 1
CLASS 1 LASER PRODUCT**

Safety Information

Laser Class 1 Information

The irradiation can lead to irritation especially in a dark environment. Do not point at people!

Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.



Laser light sensor VLM350-F280-2E2-1000

- Intelligent exposure time control
- Laser class 1, eyesafe
- Data Matrix control codes for parameterization


Laser light sensor for profile matching; Resolution: 752 x 480 Pixel; Measuring range: X = 40 ... 160 mm, Z = 60 ... 350 mm; Scan rate: 10 s-1; 2 digital outputs, RS-485 interface



Function

The SmartRunner Matcher compares current height profiles with a previously taught-in height profile. The Matcher is based on innovative SmartRunner technology and combines the light section method for detecting height profiles with a 2-D vision sensor. The light section method involves projecting a laser line onto an object. This is then detected by a camera at a specific angle. A height profile is then created using the triangulation principle. This innovative laser technology provides reliable measurements on different surfaces.

Dimensions

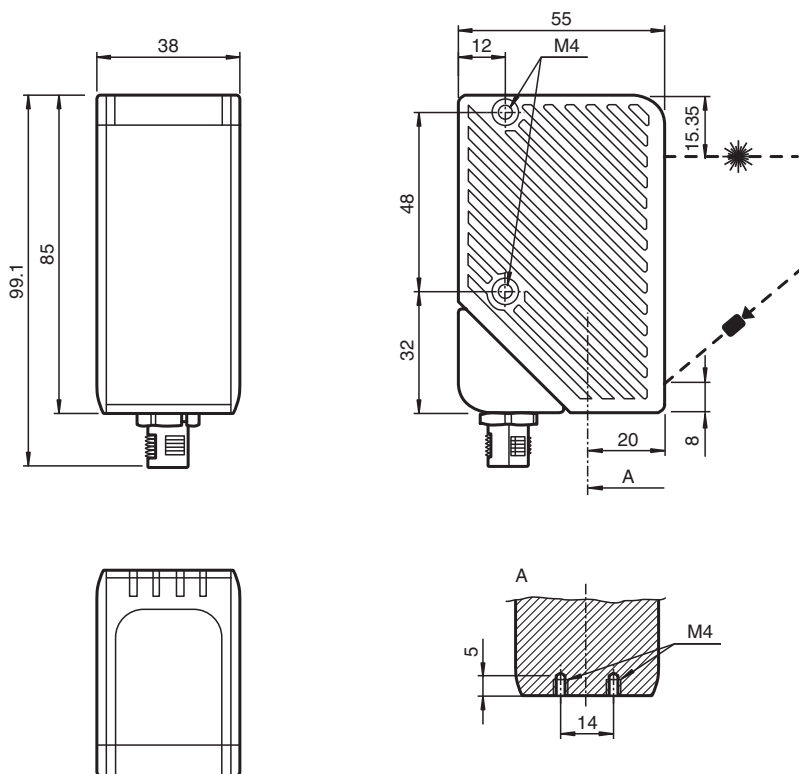

Technical Data

General specifications


Technical Data

Measurement range	X = 40 ... 160 mm ; Z = 60 ... 350 mm	
Light source		laser diode
Light type		red laser + Integrated LED lightning red 650 nm
Laser nominal ratings		
Note	VISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS	
Laser class		1
Wave length		Measuring laser: 660 nm
Pulse length		Measuring laser: 0.5 ms
Maximum optical power output		Measuring laser: 15 mW
Laser monitoring		The safety system switches off the laser when the laser current is too high
Scan rate		10 s ⁻¹
Resolution		X>0.44 mm; Z>0.4 mm at 60 mm distanc X>1.1 mm; Z>1.1 mm at 200 mm distanc X>1.9 mm; Z>2.5 mm at 350 mm distanc
Functional safety related parameters		
MTTF _d		20 a
Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green
Diagnostics indicator		LED yellow / red
Function indicator		Trigger: LED yellow ; object detected : LED red / green
Control elements		2 push-buttons
Electrical specifications		
Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 250 mA
Power consumption	P ₀	max. 6 W , Outputs without load
Interface		
Interface type		RS 485 interface
Physical		Switchable terminal resistor
Protocol		binary code
Transfer rate		38400 ... 230400 Bit/s
Input		
Input voltage		24 V
Number/Type		External triggering + 1 Input
Switching threshold		low: < 2.5 V, high: > 8 V
Output		
Number/Type		2 digital outputs
Switching type		PNP
Switching voltage		24 V
Switching current		150 mA each output
Compliance with standards and directives		
Standard conformity		
Noise immunity		EN 61000-6-2:2005
Emitted interference		EN 61000-6-4:2007/A1:2011
Degree of protection		EN 60529
Shock and impact resistance		EN 60068-2-27:2009
Laser class		IEC 60825-1:2007
Approvals and certificates		
UL approval		cULus Listed, Type 1 enclosure
CCC approval		CCC approval / marking not required for products rated ≤36 V
Approvals		CE


Technical Data

Ambient conditions		
Operating temperature		-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)
Storage temperature		-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications		
Housing width		38 mm
Housing height		85 mm
Housing depth		55 mm
Degree of protection		IP67
Connection		8-pin, M12 x 1 connector (supply + RS485 + Inputs/Outputs) ; can be rotated 90° ; Grounding : Grounding clip for PCV system
Material		
Housing		PC/ABS
Optical face		Plastic pane
Mass		approx. 125 g
Tightening torque, fastening screws		max. 2 Nm
General information		
Note		Security Instructions: <ul style="list-style-type: none">- Read the operating instructions before attempting commissioning- Installation, connection and adjustments should only be undertaken by specialist personnel- Not a safety component in accordance with the EU Machinery Directive

Connection

	
Pin	Signal
1	IN Trigger
2	+UB
3	Data+ RS-485
4	Data- RS-485
5	Teach
6	Good
7	GND
8	Bad

Assembly

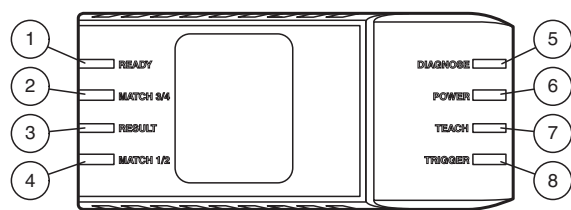












1	Ready	green/red
2	Match 3/4	green/yellow
3	Result	green/red
4	Match 1/2	green/yellow
5	Diagnose	red
6	Power	green
7	Teach	yellow
8	Trigger	yellow

Safety Information




Accessories

	V19-G-5M-PUR-ABG	Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable grey, shielded
	VLX-MB2	Mounting bracket
	VLX-MB1	Mounting bracket
	PCV-USB-RS485-Converter Set	USB to RS 485 interface converter
	V19-G-BK0,6M-PUR-U-V1-G-SRMAT	Cordset for SmartRunner Matcher, M12 to M12, 8/4-pin, PUR cable
	VLX-F231-B6	Interface module with PROFIBUS interface for SmartRunner
	VLX-F231-B17	Interface module with PROFINET interface for SmartRunner
	VLX-F231-B21	Interface module with EtherCAT interface for SmartRunner
	VLX-F231-B25	Interface module with EtherNet/IP interface for SmartRunner
	VLX-F280-C	Weld slag cover model
	VLX-F280-C-GLASS	Replacement glass for SmartRunner protective housing

Installation Conditions

Measuring range

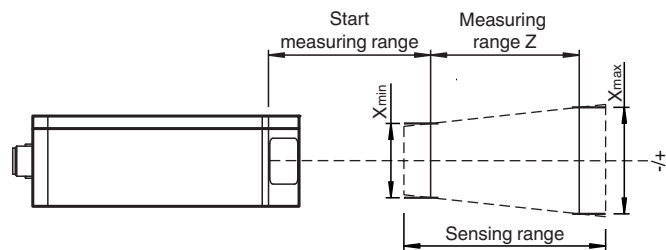

Safety Information



LASERLICHT
LASER LIGHT

LASER KLASSE 1
CLASS 1 LASER PRODUCT

Safety Information

Laser Class 1 Information

The irradiation can lead to irritation especially in a dark environment. Do not point at people!

Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.



Laser light sensor VLD700-F280-2E2-1000

- Intelligent exposure time control
- Laser class 1, eyesafe
- Data Matrix control codes for parameterization


Laser light sensor for field monitoring; Resolution: 752 x 480 pixel; Measuring range: X = 40 ... 310 mm, Z = 60 ... 700 mm; Scan rate: 30 s-1; 2 digital outputs; RS-485 interface



Function

The SmartRunner Detector performs high-precision area monitoring and switches as soon as the smallest objects enter the field of detection. The detector is based on innovative SmartRunner technology and combines the light section method for detecting height profiles with a 2-D vision sensor. The light section method involves projecting a laser line onto an object. This laser line is then detected by a camera at a specific angle. A height profile is then created using the triangulation principle. This innovative laser technology provides reliable measurements on different surfaces.

Dimensions

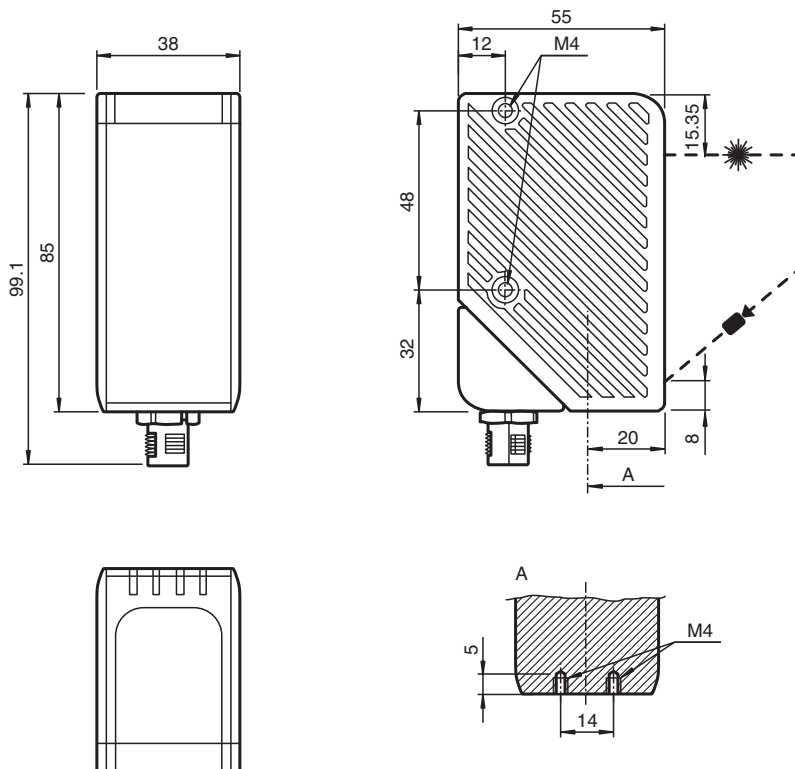

Technical Data

General specifications

Measurement range	X = 40 ... 310 mm ; Z = 60 ... 700 mm	
Light source		laser diode
Light type		red laser + Integrated LED lightning red 650 nm
Laser nominal ratings		
Note	VISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS	
Laser class		1
Wave length		Measuring laser: 660 nm
Pulse length		Measuring laser: 2 ms
Maximum optical power output		Measuring laser: 15 mW
Laser monitoring		The safety system switches off the laser when the laser current is too high
Object size		> 0.1 mm at min. read distance
Scan rate		30 s ⁻¹

Functional safety related parameters

MTTF _d		20 a
Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %

Indicators/operating means

Operation indicator		LED green
Diagnostics indicator		LED yellow / red
Function indicator		Trigger: LED yellow ; object in evaluation range : LED red / green
Control elements		2 push-buttons

Electrical specifications

Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 250 mA
Power consumption	P ₀	max. 6 W , Outputs without load

Interface

Interface type		RS 485 interface
Physical		Switchable terminal resistor
Protocol		binary code
Transfer rate		38400 ... 230400 Bit/s

Input

Input voltage		24 V
Number/Type		External triggering + 1 Input
Switching threshold		low: < 2.5 V, high: > 8 V

Output

Number/Type		2 digital outputs
Switching type		PNP
Switching voltage		24 V
Switching current		150 mA each output

Compliance with standards and directives

Standard conformity		
Noise immunity		EN 61000-6-2:2005
Emitted interference		EN 61000-6-4:2007/A1:2011
Degree of protection		EN 60529
Shock and impact resistance		EN 60068-2-27:2009
Laser class		IEC 60825-1:2007

Approvals and certificates


UL approval		cULus Listed, Type 1 enclosure
CCC approval		CCC approval / marking not required for products rated ≤36 V
Approvals		CE

Ambient conditions


Technical Data

Operating temperature	-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications	
Housing width	38 mm
Housing height	85 mm
Housing depth	55 mm
Degree of protection	IP67
Connection	8-pin, M12 x 1 connector (supply + RS485 + Inputs/Outputs) ; can be rotated 90° ; Grounding : Grounding clip for PCV system
Material	
Housing	PC/ABS
Optical face	Plastic pane
Mass	approx. 125 g
Tightening torque, fastening screws	max. 2 Nm
General information	
Note	Security Instructions: <ul style="list-style-type: none">- Read the operating instructions before attempting commissioning- Installation, connection and adjustments should only be undertaken by specialist personnel- Not a safety component in accordance with the EU Machinery Directive

Connection

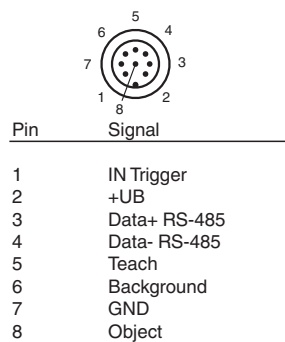



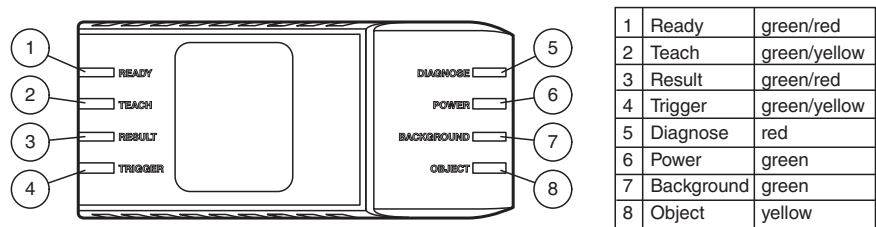








Assembly



Safety Information




Accessories

	V19-G-5M-PUR-ABG	Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable grey, shielded
	VLX-MB1	Mounting bracket
	VLX-MB2	Mounting bracket
	PCV-USB- RS485-Converter Set	USB to RS 485 interface converter
	V19-G-BK0,6M-PUR-U- V1-G-SRDET	Cordset for SmartRunner Detector M12 socket 8-pin to M12 plug 4-pin, PUR cable black
	VLX-F231-B6	Interface module with PROFIBUS interface for SmartRunner
	VLX-F231-B17	Interface module with PROFINET interface for SmartRunner
	VLX-F231-B21	Interface module with EtherCAT interface for SmartRunner
	VLX-F231-B25	Interface module with EtherNet/IP interface for SmartRunner
	VLX-F280-C	Weld slag cover model
	VLX-F280-C-GLASS	Replacement glass for SmartRunner protective housing


Installation Conditions

Measuring range

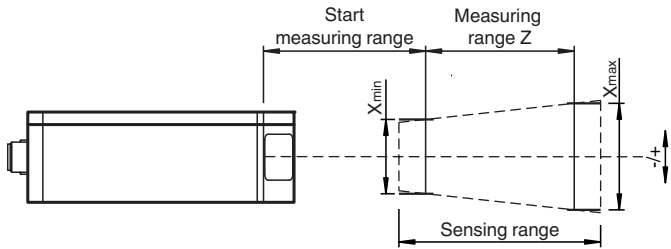

Installation Conditions

Positioning of SmartRunner to the Object for Detection

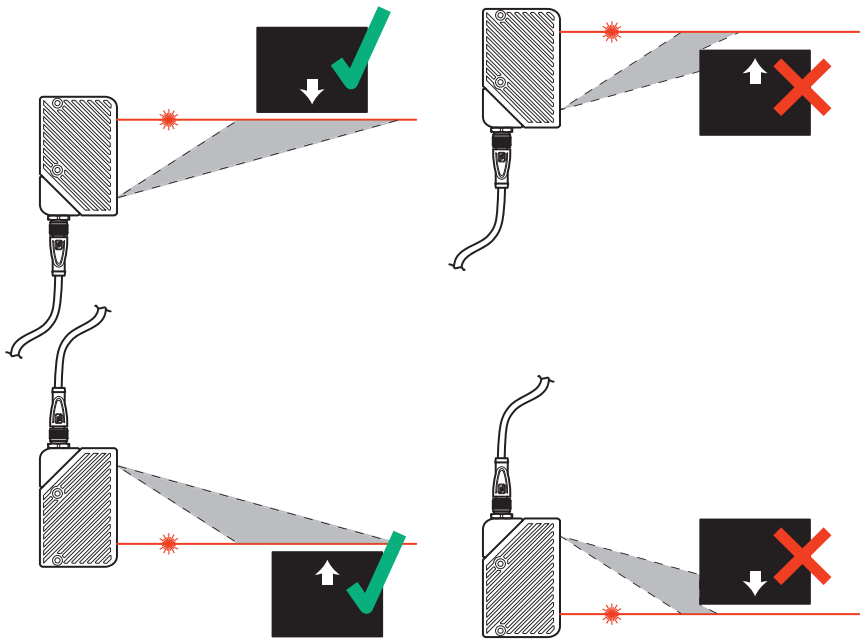

Safety Information



LASERLICHT
LASER LIGHT

LASER KLASSE 1
CLASS 1 LASER PRODUCT

Safety Information

Laser Class 1 Information
The irradiation can lead to irritation especially in a dark environment. Do not point at people!
Maintenance and repairs should only be carried out by authorized service personnel!
Attach the device so that the warning is clearly visible and readable.
The warning accompanies the device and should be attached in immediate proximity to the device.
Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.



Laser light sensor VLM350-F280-R4-1001

- Comparison of up to 32 height profiles
- Output of X/Z offset
- Intelligent exposure time control
- Laser class 1, eyesafe
- Data Matrix control codes for parameterization


Laser light sensor for profile matching; Comparison of up to 32 height profiles; Output of X/Z offset; Resolution: 752 x 480 pixel; Measuring range: X = 40 ... 160 mm, Z = 60 ... 350 mm; Scan rate: 10 s⁻¹; 2 digital outputs; RS-485 interface



Function

The SmartRunner Matcher compares current height profiles with a previously taught-in height profile. The Matcher is based on innovative SmartRunner technology and combines the light section method for detecting height profiles with a 2-D vision sensor. The light section method involves projecting a laser line onto an object. This is then detected by a camera at a specific angle. A height profile is then created using the triangulation principle. This innovative laser technology provides reliable measurements on different surfaces.

Dimensions

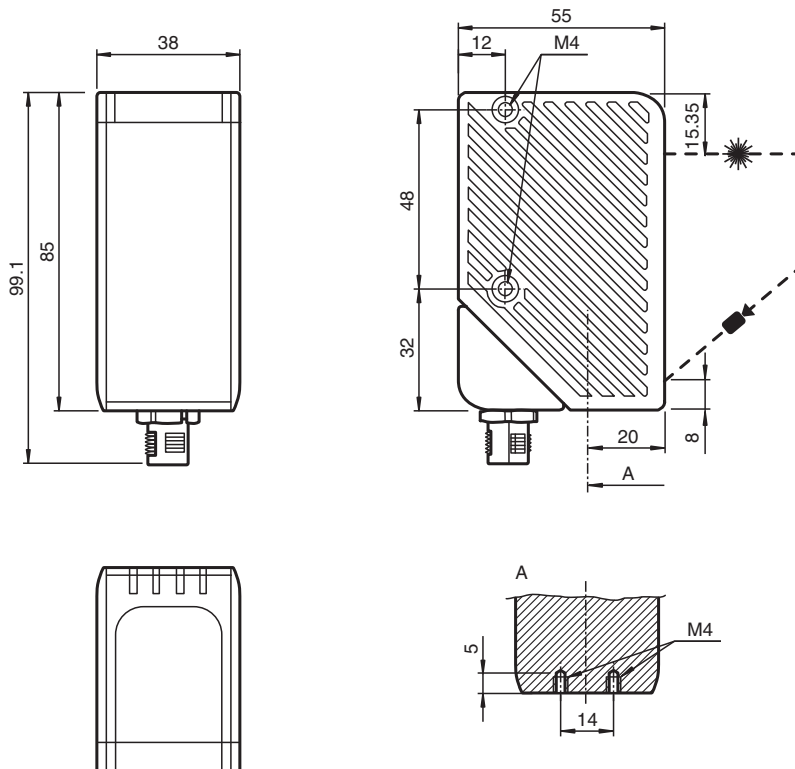

Technical Data

General specifications

Measurement range	X = 40 ... 160 mm ; Z = 60 ... 350 mm	
Light source		laser diode
Light type		red laser + Integrated LED lightning red 650 nm
Laser nominal ratings		
Note	VISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS	
Laser class		1
Wave length		Measuring laser: 660 nm
Pulse length		Measuring laser: 0.5 ms
Maximum optical power output		Measuring laser: 15 mW
Laser monitoring		The safety system switches off the laser when the laser current is too high
Scan rate		10 s ⁻¹
Resolution		X>0.44 mm; Z>0.4 mm at 60 mm distanc X>1.1 mm; Z>1.1 mm at 200 mm distanc X>1.9 mm; Z>2.5 mm at 350 mm distanc

Functional safety related parameters

MTTF _d		20 a
Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %

Indicators/operating means

Operation indicator		LED green
Diagnostics indicator		LED yellow / red
Function indicator		Trigger: LED yellow ; object detected : LED red / green
Control elements		2 push-buttons

Electrical specifications

Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 250 mA
Power consumption	P ₀	max. 6 W , Outputs without load

Interface

Interface type		RS 485 interface
Physical		Switchable terminal resistor
Protocol		binary code
Transfer rate		38400 ... 230400 Bit/s

Input

Input voltage		24 V
Number/Type		External triggering + 1 Input
Switching threshold		low: < 2.5 V, high: > 8 V

Output

Number/Type		2 digital outputs
Switching type		PNP
Switching voltage		24 V
Switching current		150 mA each output

Compliance with standards and directives

Standard conformity		
Noise immunity		EN 61000-6-2:2005
Emitted interference		EN 61000-6-4:2007/A1:2011
Degree of protection		EN 60529
Shock and impact resistance		EN 60068-2-27:2009
Laser class		IEC 60825-1:2007


Approvals and certificates

UL approval		cULus Listed, Type 1 enclosure
CCC approval		CCC approval / marking not required for products rated ≤36 V


Technical Data

Approvals		CE
Ambient conditions		
Operating temperature		-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)
Storage temperature		-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications		
Housing width		38 mm
Housing height		85 mm
Housing depth		55 mm
Degree of protection		IP67
Connection		8-pin, M12 x 1 connector (supply + RS485 + Inputs/Outputs) ; can be rotated 90° ; Grounding : Grounding clip for PCV system
Material		
Housing		PC/ABS
Optical face		Plastic pane
Mass		approx. 125 g
Tightening torque, fastening screws		max. 2 Nm
General information		
Note		Security Instructions: - Read the operating instructions before attempting commissioning - Installation, connection and adjustments should only be undertaken by specialist personnel - Not a safety component in accordance with the EU Machinery Directive

Connection

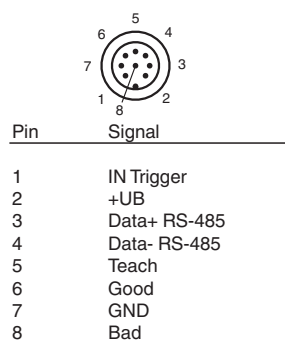



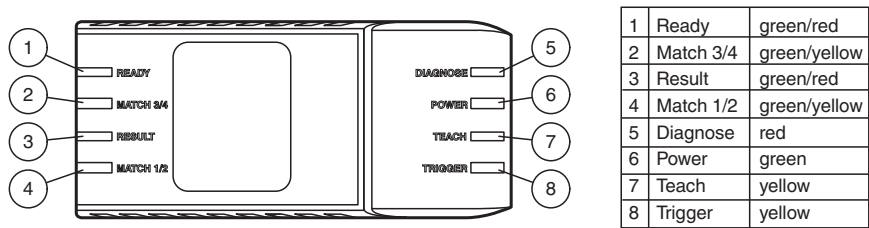








Assembly



Safety Information




Accessories

	V19-G-5M-PUR-ABG	Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable grey, shielded
	VLX-MB2	Mounting bracket
	VLX-MB1	Mounting bracket
	PCV-USB-RS485-Converter Set	USB to RS 485 interface converter
	V19-G-BK0,6M-PUR-U-V1-G-SRMAT	Cordset for SmartRunner Matcher, M12 to M12, 8/4-pin, PUR cable
	VLX-F231-B6	Interface module with PROFIBUS interface for SmartRunner
	VLX-F231-B17	Interface module with PROFINET interface for SmartRunner
	VLX-F231-B21	Interface module with EtherCAT interface for SmartRunner
	VLX-F231-B25	Interface module with EtherNet/IP interface for SmartRunner
	VLX-F280-C	Weld slag cover model
	VLX-F280-C-GLASS	Replacement glass for SmartRunner protective housing

Installation Conditions

Measuring range

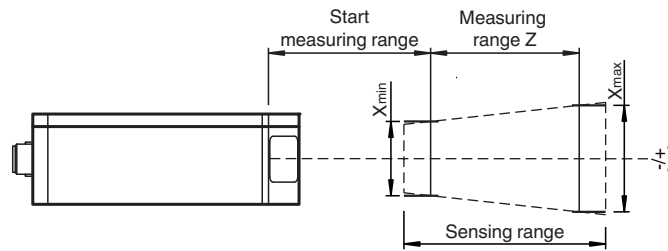

Safety Information



**LASERLICHT
LASER LIGHT**

**LASER KLASSE 1
CLASS 1 LASER PRODUCT**

Safety Information

Laser Class 1 Information

The irradiation can lead to irritation especially in a dark environment. Do not point at people!

Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.



Laser light sensor VLM350-F280-R4-1101

- Resolution 1280 x 960 pixel
- Comparison of up to 32 height profiles
- Output of X/Z offset
- Intelligent exposure time control
- Laser class 1, eyesafe
- Data Matrix control codes for parameterization


Laser light sensor for profile matching; Comparison of up to 32 height profiles; Output of X/Z offset; Resolution: 1280 x 960 pixel; Measuring range: X = 40 ... 160 mm, Z = 60 ... 350 mm; Scan rate: 30 s-1; 2 digital outputs; RS-485 interface



Function

The SmartRunner Matcher compares current height profiles with a previously taught-in height profile. The Matcher is based on innovative SmartRunner technology and combines the light section method for detecting height profiles with a 2-D vision sensor. The light section method involves projecting a laser line onto an object. This is then detected by a camera at a specific angle. A height profile is then created using the triangulation principle. This innovative laser technology provides reliable measurements on different surfaces.

Dimensions

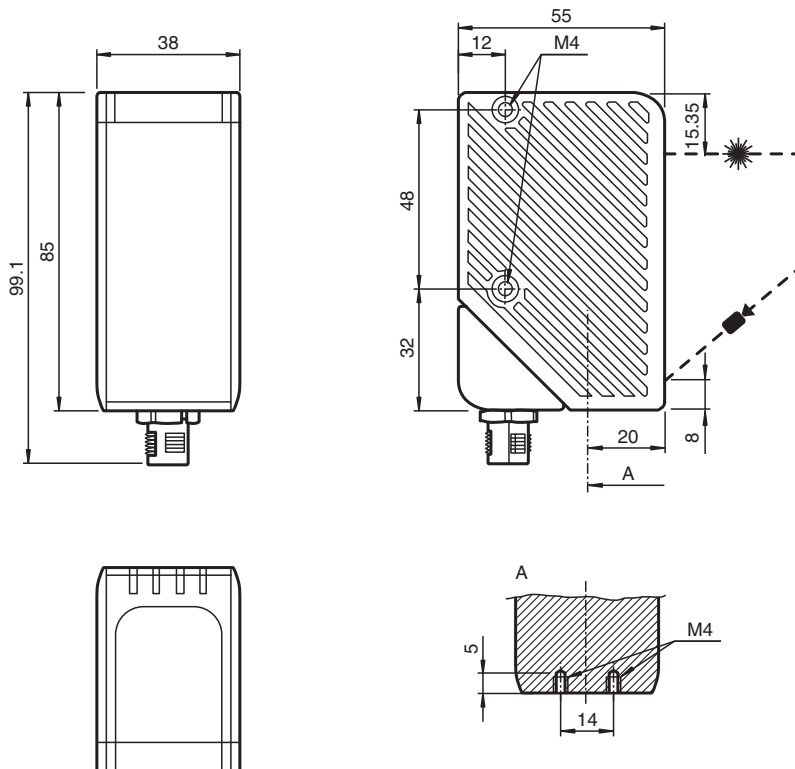

Technical Data

General specifications

Measurement range	X = 40 ... 160 mm ; Z = 60 ... 350 mm	
Light source		laser diode
Light type		red laser + Integrated LED lightning red 650 nm
Laser nominal ratings		
Note	VISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS	
Laser class		1
Wave length		Measuring laser: 660 nm
Pulse length		Measuring laser: 0.5 ms
Maximum optical power output		Measuring laser: 15 mW
Laser monitoring		The safety system switches off the laser when the laser current is too high
Scan rate		30 s ⁻¹
Resolution		X>0.25 mm; Z>0.2 mm at 60 mm distance X>0.5 mm; Z>0.6 mm at 200 mm distance X>0.9 mm; Z>1.3 mm at 350 mm distance

Functional safety related parameters

MTTF _d		20 a
Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %

Indicators/operating means

Operation indicator		LED green
Diagnostics indicator		LED yellow / red
Function indicator		Trigger: LED yellow ; object detected : LED red / green
Control elements		2 push-buttons

Electrical specifications

Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 250 mA
Power consumption	P ₀	max. 6 W , Outputs without load

Interface

Interface type		RS 485 interface
Physical		Switchable terminal resistor
Protocol		binary code
Transfer rate		38400 ... 230400 Bit/s

Input

Input voltage		24 V
Number/Type		External triggering + 1 Input
Switching threshold		low: < 2.5 V, high: > 8 V

Output

Number/Type		2 digital outputs
Switching type		PNP
Switching voltage		24 V
Switching current		150 mA each output

Compliance with standards and directives

Standard conformity		
Noise immunity		EN 61000-6-2:2005
Emitted interference		EN 61000-6-4:2007/A1:2011
Degree of protection		EN 60529
Shock and impact resistance		EN 60068-2-27:2009
Laser class		IEC 60825-1:2007


Approvals and certificates

UL approval		cULus Listed, Type 1 enclosure
CCC approval		CCC approval / marking not required for products rated ≤36 V


Technical Data

Approvals		CE
Ambient conditions		
Operating temperature		-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)
Storage temperature		-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications		
Housing width		38 mm
Housing height		85 mm
Housing depth		55 mm
Degree of protection		IP67
Connection		8-pin, M12 x 1 connector (supply + RS485 + Inputs/Outputs) ; can be rotated 90° ; Grounding : Grounding clip for PCV system
Material		
Housing		PC/ABS
Optical face		Plastic pane
Mass		approx. 125 g
Tightening torque, fastening screws		max. 2 Nm
General information		
Note		Security Instructions: - Read the operating instructions before attempting commissioning - Installation, connection and adjustments should only be undertaken by specialist personnel - Not a safety component in accordance with the EU Machinery Directive

Connection



Assembly

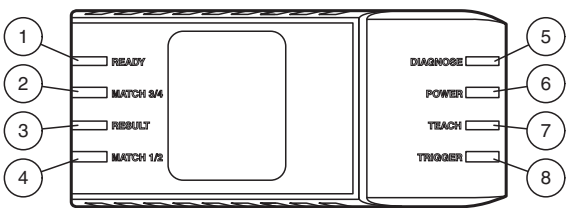












1	Ready	green/red
2	Match 3/4	green/yellow
3	Result	green/red
4	Match 1/2	green/yellow
5	Diagnose	red
6	Power	green
7	Teach	yellow
8	Trigger	yellow

Safety Information




Accessories

	V19-G-5M-PUR-ABG	Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable grey, shielded
	VLX-MB2	Mounting bracket
	VLX-MB1	Mounting bracket
	PCV-USB-RS485-Converter Set	USB to RS 485 interface converter
	V19-G-BK0,6M-PUR-U-V1-G-SRMAT	Cordset for SmartRunner Matcher, M12 to M12, 8/4-pin, PUR cable
	VLX-F231-B6	Interface module with PROFIBUS interface for SmartRunner
	VLX-F231-B17	Interface module with PROFINET interface for SmartRunner
	VLX-F231-B21	Interface module with EtherCAT interface for SmartRunner
	VLX-F231-B25	Interface module with EtherNet/IP interface for SmartRunner
	VLX-F280-C	Weld slag cover model
	VLX-F280-C-GLASS	Replacement glass for SmartRunner protective housing

Installation Conditions

Measuring range

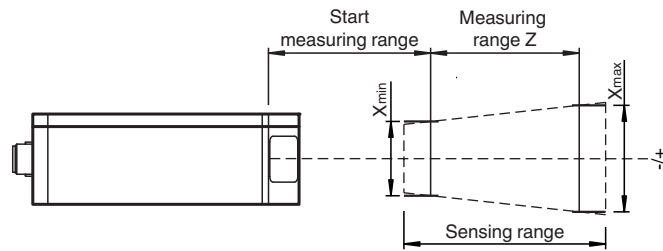

Safety Information



**LASERLICHT
LASER LIGHT**

**LASER KLASSE 1
CLASS 1 LASER PRODUCT**

Safety Information

Laser Class 1 Information

The irradiation can lead to irritation especially in a dark environment. Do not point at people!

Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.



Laser light sensor VLM350-F280-R4-1002

- Comparison of up to 32 height profiles
- Evaluation frequency 30 Hz
- Output of X/Z offset
- Intelligent exposure time control
- Laser class 1, eyesafe
- Data Matrix control codes for parameterization


Laser light sensor for profile matching; Comparison of up to 32 height profiles; Output of X/Z offset; Resolution: 752 x 480 pixel; Measuring range: X = 40 ... 160 mm, Z = 60 ... 350 mm; Scan rate: 30 s⁻¹; 2 digital outputs; RS-485 interface



Function

The SmartRunner Matcher compares current height profiles with a previously taught-in height profile. The Matcher is based on innovative SmartRunner technology and combines the light section method for detecting height profiles with a 2-D vision sensor. The light section method involves projecting a laser line onto an object. This is then detected by a camera at a specific angle. A height profile is then created using the triangulation principle. This innovative laser technology provides reliable measurements on different surfaces.

Dimensions

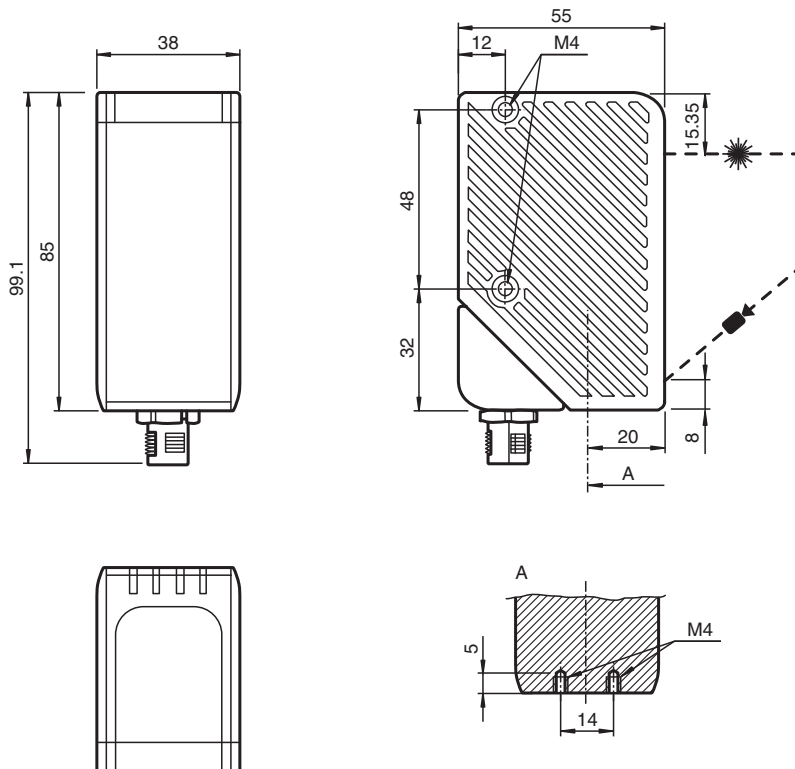


Technical Data

General specifications		
Measurement range		X = 40 ... 160 mm ; Z = 60 ... 350 mm
Light source		laser diode
Light type		red laser + Integrated LED lightning red 650 nm
Laser nominal ratings		
Note		VISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS
Laser class		1
Wave length		Measuring laser: 660 nm
Pulse length		Measuring laser: 0.5 ms
Maximum optical power output		Measuring laser: 15 mW
Laser monitoring		The safety system switches off the laser when the laser current is too high
Scan rate		30 s ⁻¹
Evaluation frequency		30 Hz
Resolution		X>0.44 mm; Z>0.4 mm at 60 mm distanc X>1.1 mm; Z>1.1 mm at 200 mm distanc X>1.9 mm; Z>2.5 mm at 350 mm distanc
Functional safety related parameters		
MTTF _d		20 a
Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green
Diagnostics indicator		LED yellow / red
Function indicator		Trigger: LED yellow ; object detected : LED red / green
Control elements		2 push-buttons
Electrical specifications		
Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 250 mA
Power consumption	P ₀	max. 6 W , Outputs without load
Interface		
Interface type		RS 485 interface
Physical		Switchable terminal resistor
Protocol		binary code
Transfer rate		38400 ... 230400 Bit/s
Input		
Input voltage		24 V
Number/Type		External triggering + 1 Input
Switching threshold		low: < 2.5 V, high: > 8 V
Output		
Number/Type		2 digital outputs
Switching type		PNP
Switching voltage		24 V
Switching current		150 mA each output
Compliance with standards and directives		
Standard conformity		
Noise immunity		EN 61000-6-2:2005
Emitted interference		EN 61000-6-4:2007/A1:2011
Degree of protection		EN 60529
Shock and impact resistance		EN 60068-2-27:2009
Laser class		IEC 60825-1:2007
Approvals and certificates		
UL approval		cULus Listed, Type 1 enclosure

Technical Data


CCC approval	CCC approval / marking not required for products rated ≤36 V
Approvals	CE
Ambient conditions	
Operating temperature	-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications	
Housing width	38 mm
Housing height	85 mm
Housing depth	55 mm
Degree of protection	IP67
Connection	8-pin, M12 x 1 connector (supply + RS485 + Inputs/Outputs) ; can be rotated 90° ; Grounding : Grounding clip for PCV system
Material	
Housing	PC/ABS
Optical face	Plastic pane
Mass	approx. 125 g
Tightening torque, fastening screws	max. 2 Nm
General information	
Note	Security Instructions: <ul style="list-style-type: none">- Read the operating instructions before attempting commissioning- Installation, connection and adjustments should only be undertaken by specialist personnel- Not a safety component in accordance with the EU Machinery Directive

Connection



Pin	Signal
1	IN Trigger
2	+UB
3	Data+ RS-485
4	Data- RS-485
5	Teach
6	Good
7	GND
8	Bad

Assembly

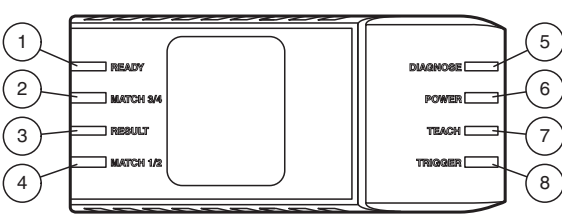












1	Ready	green/red
2	Match 3/4	green/yellow
3	Result	green/red
4	Match 1/2	green/yellow
5	Diagnose	red
6	Power	green
7	Teach	yellow
8	Trigger	yellow

Safety Information




Accessories

	V19-G-5M-PUR-ABG	Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable grey, shielded
	VLX-MB2	Mounting bracket
	VLX-MB1	Mounting bracket
	PCV-USB-RS485-Converter Set	USB to RS 485 interface converter
	V19-G-BK0,6M-PUR-U-V1-G-SRMAT	Cordset for SmartRunner Matcher, M12 to M12, 8/4-pin, PUR cable
	VLX-F231-B6	Interface module with PROFIBUS interface for SmartRunner
	VLX-F231-B17	Interface module with PROFINET interface for SmartRunner
	VLX-F231-B21	Interface module with EtherCAT interface for SmartRunner
	VLX-F231-B25	Interface module with EtherNet/IP interface for SmartRunner
	VLX-F280-C	Weld slag cover model
	VLX-F280-C-GLASS	Replacement glass for SmartRunner protective housing

Installation Conditions

Measuring range

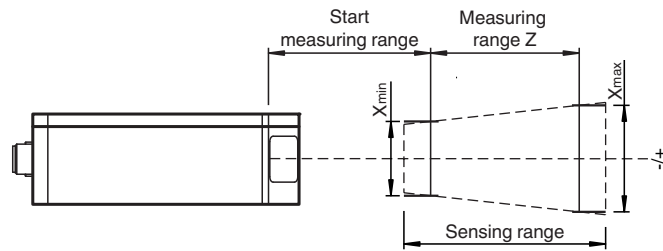

Safety Information



**LASERLICHT
LASER LIGHT**

**LASER KLASSE 1
CLASS 1 LASER PRODUCT**

Safety Information

Laser Class 1 Information

The irradiation can lead to irritation especially in a dark environment. Do not point at people!

Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.



Laser light sensor VLM700-F280-R4-1102

- Comparison of up to 32 height profiles
- Output of X/Z offset
- Intelligent exposure time control
- Laser class 1, eyesafe
- Data Matrix control codes for parameterization


Laser light sensor for profile matching; Comparison of up to 32 height profiles; Output of X/Z offset; Resolution: 1280 x 960 pixels; Measuring range: X = 60 ... 300 mm, Z = 100 ... 700 mm; Scan rate: 15 s-1; 2 digital outputs; RS-485 interface



Function

The SmartRunner Matcher compares current height profiles with a previously taught-in height profile. The Matcher is based on innovative SmartRunner technology and combines the light section method for detecting height profiles with a 2-D vision sensor. The light section method involves projecting a laser line onto an object. This is then detected by a camera at a specific angle. A height profile is then created using the triangulation principle. This innovative laser technology provides reliable measurements on different surfaces.

Dimensions

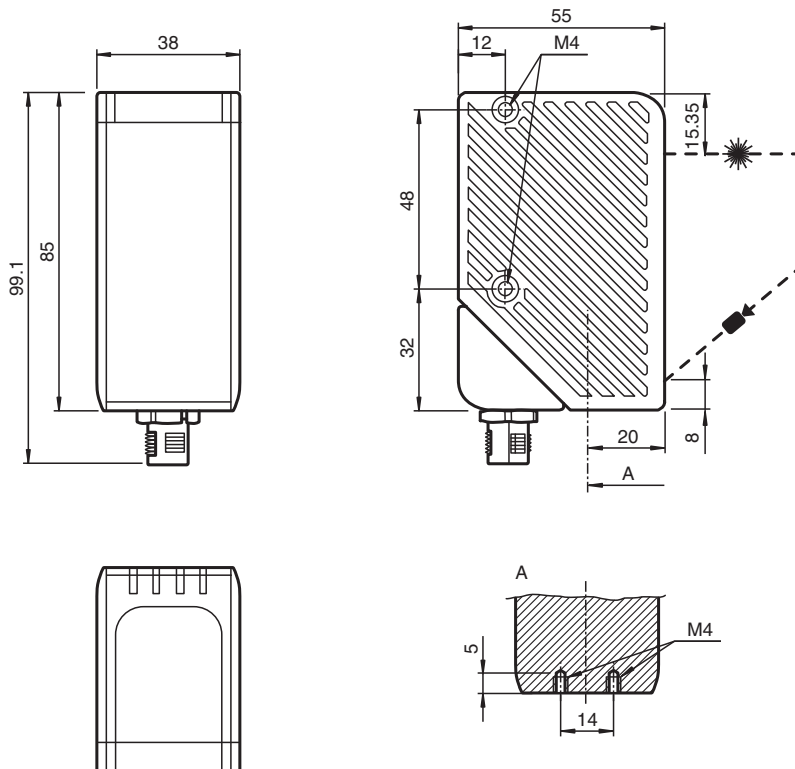

Technical Data

General specifications

Measurement range	X = 60 ... 300 mm ; Z = 100 ... 700 mm	
Light source		laser diode
Light type		red laser + Integrated LED lightning red 650 nm
Laser nominal ratings		
Note	VISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS	
Laser class		1
Wave length		Measuring laser: 660 nm
Pulse length		Measuring laser: 0.5 ms
Maximum optical power output		Measuring laser: 15 mW
Laser monitoring		The safety system switches off the laser when the laser current is too high
Scan rate		15 s ⁻¹
Resolution		X>0.44 mm; Z>0.4 mm at 60 mm distance X>1.0 mm; Z>2.0 mm at 400 mm distance X>1.8 mm; Z>11.1 mm at 700 mm distance

Functional safety related parameters

MTTF _d		20 a
Mission Time (T _M)		10 a
Diagnostic Coverage (DC)		0 %

Indicators/operating means

Operation indicator		LED green
Diagnostics indicator		LED yellow / red
Function indicator		Trigger: LED yellow ; object detected : LED red / green
Control elements		2 push-buttons

Electrical specifications

Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 250 mA
Power consumption	P ₀	max. 6 W , Outputs without load

Interface

Interface type		RS 485 interface
Physical		Switchable terminal resistor
Protocol		binary code
Transfer rate		38400 ... 230400 Bit/s

Input

Input voltage		24 V
Number/Type		External triggering + 1 Input
Switching threshold		low: < 2.5 V, high: > 8 V

Output

Number/Type		2 digital outputs
Switching type		PNP
Switching voltage		24 V
Switching current		150 mA each output

Compliance with standards and directives

Standard conformity		
Noise immunity		EN 61000-6-2:2005
Emitted interference		EN 61000-6-4:2007/A1:2011
Degree of protection		EN 60529
Shock and impact resistance		EN 60068-2-27:2009
Laser class		IEC 60825-1:2007


Approvals and certificates

UL approval		cULus Listed, Type 1 enclosure
CCC approval		CCC approval / marking not required for products rated ≤36 V


Technical Data

Approvals		CE
Ambient conditions		
Operating temperature		-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)
Storage temperature		-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications		
Housing width		38 mm
Housing height		85 mm
Housing depth		55 mm
Degree of protection		IP67
Connection		8-pin, M12 x 1 connector (supply + RS485 + Inputs/Outputs) ; can be rotated 90° ; Grounding : Grounding clip for PCV system
Material		
Housing		PC/ABS
Optical face		Plastic pane
Mass		approx. 125 g
Tightening torque, fastening screws		max. 2 Nm
General information		
Note		Security Instructions: - Read the operating instructions before attempting commissioning - Installation, connection and adjustments should only be undertaken by specialist personnel - Not a safety component in accordance with the EU Machinery Directive

Connection

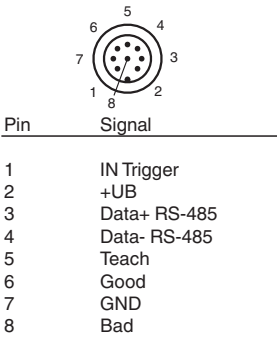



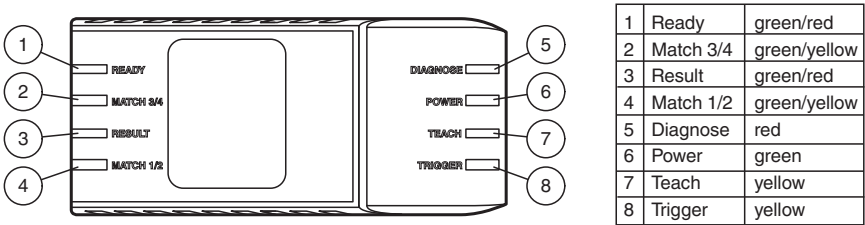








Assembly



Safety Information




Accessories

	V19-G-5M-PUR-ABG	Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable grey, shielded
	VLX-MB2	Mounting bracket
	VLX-MB1	Mounting bracket
	PCV-USB-RS485-Converter Set	USB to RS 485 interface converter
	V19-G-BK0,6M-PUR-U-V1-G-SRMAT	Cordset for SmartRunner Matcher, M12 to M12, 8/4-pin, PUR cable
	VLX-F231-B6	Interface module with PROFIBUS interface for SmartRunner
	VLX-F231-B17	Interface module with PROFINET interface for SmartRunner
	VLX-F231-B21	Interface module with EtherCAT interface for SmartRunner
	VLX-F231-B25	Interface module with EtherNet/IP interface for SmartRunner
	VLX-F280-C	Weld slag cover model
	VLX-F280-C-GLASS	Replacement glass for SmartRunner protective housing

Installation Conditions

Measuring range

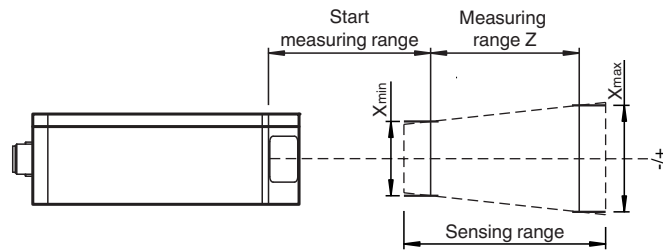

Safety Information



**LASERLICHT
LASER LIGHT**

**LASER KLASSE 1
CLASS 1 LASER PRODUCT**

Safety Information

Laser Class 1 Information

The irradiation can lead to irritation especially in a dark environment. Do not point at people!

Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: phb@nt-rt.ru || сайт: <https://pepperl-fuchs.nt-rt.ru/>